



## TEICNIUIL-PRIORY CONSULTING ENGINEERS Ltd

### Engineering Assessment and Drainage Design Report

Project: Proposed Housing Development at Ardshanvooley, Park Rd, Killarney

Client: Wrightwood Developments Ltd

**ENGINEER: Matt Clarke Bsc(hons) MSc C. Build E FCABE MIEI**  
**Chartered Building Engineer**  
**Teicniuil-Priory Consulting Engineers Ltd**

| Date    | Revision | Issued For          | Prepared By | Checked By |
|---------|----------|---------------------|-------------|------------|
| 21-7-26 |          | Planning submission | MC          | MC / JON   |
|         |          |                     |             |            |
|         |          |                     |             |            |
|         |          |                     |             |            |
|         |          |                     |             |            |

| <b>Contents</b>                                                                                                        | <b>page</b> |
|------------------------------------------------------------------------------------------------------------------------|-------------|
| 1.0 Introduction                                                                                                       | 3           |
| 2.0 Qualifications and Experience                                                                                      | 3           |
| 3.0 Location of Site                                                                                                   | 4           |
| 4.0 Development Description                                                                                            | 5           |
| 5.0 Soil Characteristics / General Geology and Hydrology                                                               | 6           |
| 5.1 On-site Soil Infiltration Testing                                                                                  | 7           |
| 5.2 Flooding Risk                                                                                                      | 7           |
| 6.0 Surface Water Drainage                                                                                             | 8           |
| 6.1 SUDs Overview                                                                                                      | 8           |
| 6.2 KCC Development Plan (2022 to 2028)                                                                                | 9           |
| 6.3 Suds Methods                                                                                                       | 10          |
| 6.3.3 Recommended Suds                                                                                                 | 16          |
| 6.4 Conveyancing system                                                                                                | 17          |
| 6.5 Storm water management                                                                                             | 17          |
| 6.5.1 Water Quantity                                                                                                   | 17          |
| 6.5.2 Water Quality                                                                                                    | 19          |
| 6.5.3 Groundwater Protection Measures                                                                                  | 20          |
| 6.4 Operation and Maintenance                                                                                          | 22          |
| 7.0 Storm Water Design                                                                                                 | 30          |
| 7.1 Calculation procedure for the Design of<br>Soakaway and infiltration Methods                                       | 30          |
| 7.2 Areas Considered                                                                                                   | 31          |
| 7.3 Soakaway Design                                                                                                    | 32          |
| 7.4 Bioretention Attenuation Calculations                                                                              | 34          |
| 7.4.1 Bioretention Soil Media                                                                                          | 35          |
| 7.4.2 Siltation effects on<br>Infiltration Performance                                                                 | 36          |
| 7.4.3 Bioretention Attenuation<br>Calculations                                                                         | 36          |
| 7.5 Detention Dasin Design                                                                                             | 39          |
| 7.6 Tree Pit Design                                                                                                    | 41          |
| 7.7 Permeable Paving Design                                                                                            | 43          |
| 7.8 Flow Routes and Greenfield Run-off                                                                                 | 44          |
| 7.9 Conveyancing Pipework Design                                                                                       | 45          |
| 8.0 Foul Water Drainage                                                                                                | 46          |
| 8.1 Foul Water Drainage Design                                                                                         | 47          |
| 9.0 Mains Water Supply                                                                                                 | 52          |
| 9.1 Fire Flow Requirements                                                                                             | 53          |
| 10.0 Storm and Foul Water Management in relation<br>to the Existing Waste Water Treatment<br>Plant (WWTP) in Killarney | 53          |
| 11.0 Caveats                                                                                                           | 54          |

|            |            |
|------------|------------|
| References | Page<br>55 |
|------------|------------|

|                   |                                                                                                                                                                                                                                                                                  |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <u>Appendices</u> | <i>Appendix A - Confirmation of Feasibility (Irish Water)</i><br><i>Appendix B - Conveyancing Pipework outlet to Suds Component / flow rates</i><br><i>Appendix C - Tencate 'Geoclean' Aqua textile Data Sheet</i><br><i>Appendix D – Summarized Hydraulic Flow Calculations</i> |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### **Associated Documents/Reports (annexed to this report)**

Soil Infiltration Report  
Flood Risk Assessment  
Calculation Sheet Document

### **Drawings**

See Drawing Register

## **1.0 Introduction**

This report details the stormwater drainage design, which includes 'Sustainable Urban Drainage Systems' (SuDs methods), foul water drainage design, and water supply measures to be implemented as part of the proposed Housing Development consisting of 123 No Housing units, to be constructed on a greenfield site, at Ardshavooley, Killarney, Co, Kerry.

## **2.0 Qualifications and Experience**

Teicniuil-Priory Consulting Engineers Ltd have been commissioned to carry out the Civil Engineering Design Works of this proposed development, including the undertaking the role of 'Assigned Certifier', on behalf of the developer, Wrightwood Developments.

The writer, Matt Clarke, Principal within Teicniuil-Priory Consulting Engineers, is a Chartered Engineer with over 25 years of Engineering experience including Drainage Design and SuDs assessments

He holds the following professional accreditations:

*Fellow of the Association of Building Engineering*  
*Member of the Institution of Engineers of Ireland*  
*Member of the Chartered Institution of Building*  
*Registered Building Surveyor with the Society of Chartered Surveyors Ireland*

### **3.0 Location of Site**

#### **Address:**

Lands to the Ardshanavooly, Killarney, Co. Kerry

#### **Coordinates:**


ITM: 494050, 591356

GPS: 52° 03'52.12" N, 9° 30' 05.32" W

This site is located approximately 0.9km from Killarney Town Centre, and is in close proximity to various amenities – many within walking distance. Several small housing estates already exist to the South of the site. A proposed housing estate is also earmarked to the East of the site, under separate development works.

The site consists of existing grazing farmland. (habitat: GS2 – ‘dry meadows and grassy verges’ – ‘Guide to *Habitats in Ireland – The heritage council*), and is gently sloped, in a general North-to-South direction, presenting a gradual average slope of approximately 1:60. Clear boundaries are present; substantial earthen mounds exist, with some planted with mature trees, on the Northern and Eastern boundaries. A smaller earthen mound planted with a tree line is also present adjacent a small road on the Western boundary. A concrete panel fence-type structure exists to the South, forming the boundary of a previous housing development.

The extent of the site is outlined in red on the extracted topographical survey, in fig 1, below and on the aerial photograph shown in fig 2, below. (also see drawing register, for relevant drawings).



**Fig 1 - Extract from Topographical Survey – Proposed Development Site Outlined in Red**  
(Refer to Topographical Survey drawing (drwg No 91-24-0-001 Rev A))



**Fig 2 – Aerial Photograph – Proposed Development Site Outlined in Red**

#### **4.0 Development Description:**

Development at a 2.23 hectare site comprising of:

1. Construction of a 123 no. dwellings in a mix of duplex, maisonette and apartment typologies comprising 16 no. 1 bed apartments, 6 no. 2 bed apartments, 11 no. 1 bed duplex apartments, 11 no. 2 bed duplex maisonettes, 28 no. 2 bed duplex apartments, 28 no. 3 bed duplex maisonettes and 23 no. 3 bed terrace houses, all in building heights ranging from 2 to 4 storeys. The development includes 20 no. townhouses designed to comply with requirements for affordable housing units and will be offered as affordable housing units.
2. A total of 139 no. surface car parking spaces, including 4 no. car-share parking spaces, 6 no. visitor spaces, and 5 no. assigned Part M/accessible spaces.
3. Bicycle parking comprising of 272 no spaces in total, comprising 124 no. spaces within the private open space of ground floor residential units and 96 no. spaces within secure sheltered structures and designated secure bicycle parking areas, and 52 no. short stay/visitor spaces.
4. 3,600 sq.m of public open space, including arrival pocket park, central pocket park and amenity landscape areas (including 117 sq.m of play), grass lawns, kickabout areas, picnic areas and seating areas;

5. 956 sq.m of communal external open space, including seating areas, nature trails, and amenity grass lawns.
6. Additional environmental open space of 1,790 sq.m, including landscape buffers, protection and enhancement of existing hedgerows and trees.
7. A new vehicular, pedestrian and cyclist access from the existing estate road adjoining the site to the south.
8. Infrastructure works to serve the proposed development to include the internal road and footpath network, ESB cabinets/substations/switchrooms, site and external building lighting, site drainage works, hard and soft landscaping, boundary treatments, communal bin stores, and all ancillary site services and development works above and below ground.

## **5.0 Soil Characteristics / General Geology and Hydrology**

The soil characteristics of this site are detailed in the associated 'Soil Infiltration Report', which includes a detailed description of the geology and hydrology of the site.

Various geological and hydrological maps (GSI mapping) are also presented in the Soil Infiltration report.

In summary, the following was noted;

Ground water aquifer: Regionally Important Gravel Aquifer

Ground water Vulnerability: High

Subsoil Permeability: High

Teasgasc EPA Soil: Shallow well Drained ( $A_{minsw}$ ), Parent material: Glaciofluvial sands and gravels (GDSs)

Subsoil: Gravel derived from Devonian Sandstones (GDSs)

Bedrock: DIRTAGE Limestone Formation (CDDRTG) – Bioclastic herty grey limestone

Surface Water Features: None within 250m from site perimeter

Wells and Springs: No wells or springs within 250m from site perimeter.

Groundwater Protection Scheme IE\_GSI\_GWPS\_Rep\_11

Karst Features: no karst features within 250m of site perimeter

## **5.1 On-site Soil Infiltration testing**

A full description of the soil investigation is given in the 'On-site soil infiltration testing report' annexed to this Engineering Assessment and Drainage Design Report.

In summary, upon trial hole excavation, the subsoil was found to consist of a slightly silty/sandy gravel, with sporadic cobbles (<200mm dia), described in the general 'soil build-up', as follows;

Horizon A: 250mm BGL of organic top soil

Horizon B: 250mm to 800mm of slightly silty sandy gravel, with some sporadic cobbles (< 200mm dia)

Horizon C: 800mm to Base of pit (between 1.9m and 2.65m slightly silty sandy gravel, with some sporadic cobbles (< 200mm dia)

On-site testing was conducted to BRE 365 Soakaway Design Guidelines, and the soil infiltration rates were found to be between  $58.8 \times 10^{-6} \text{m/s}$  and  $122.0 \times 10^{-6} \text{m/s}$ . These represent good infiltration characteristics, indicative of the soil type observed on-site, and as expected from both the Geological Mapping desk study and the writer's local knowledge of the area.

No evidence of Ground Water was noted in any trial hole. The water table is deemed > 5m in depth.

The above data corresponds with known site conditions within adjacent lands, and indicates that the site is suitable for infiltration design, with protective measures.

## **5.2 Flood Risk**

Review of the CFRAM maps shows that there is no fluvial flooding risk within this site. No surface water features exist within 250mm of this proposed development site.

There is no evidence of any previous flooding on this site.

The depth of the water table (>5m) indicates there is no propensity for Groundwater flooding.

A Flood Risk Assessment has been carried out, and the reader is referred to that report.

## **6.0 Surface Water drainage**

### **6.1 SUDS overview**

A Sustainable Urban Drainage System (SUDS) is to be designed and incorporated into the development.

SUDs has been defined as *“a way of managing rainfall that minimizes the negative impacts on the quantity and quality of run-off while maximizing the benefits of amenity and biodiversity for people and the environment.”* - CIRIA C753, ‘The SUDS Manual’ 2015. This guidance document will be referred to as ‘the SUDs Manual’ throughout this report.


The design philosophy of SUDs is to manage and control surface water drainage by providing Nature Based Stormwater Solutions, which mimic the natural drainage regimes of a greenfield site.

This philosophy is encapsulated in the ‘4 pillars’ of SUDs design, for which the criteria are;

1. Quantity
  - Manage and control run-off flow rates from impermeable areas, and prevention of flooding
  - Support evapotranspiration from planting / vegetation
  - Encourage groundwater recharge
2. Quality
  - Provide measures to reduce pollution in stormwater, by providing a ‘treatment train’ in the stormwater conveyance process
  - Protect groundwater / aquifers
  - Protect surface watercourses
3. Amenity
  - natural ‘soft’ SUDs solutions provides increased connection with nature
  - aesthetically pleasing
  - increase amenity ‘play’ areas
  - Provides more ‘natural’ landscape within the urban context
4. Biodiversity
  - provide habitats for flora and fauna
  - encourages engagement with wildlife.
  - assists with carbon reduction

The above is summarized in the following diagram;



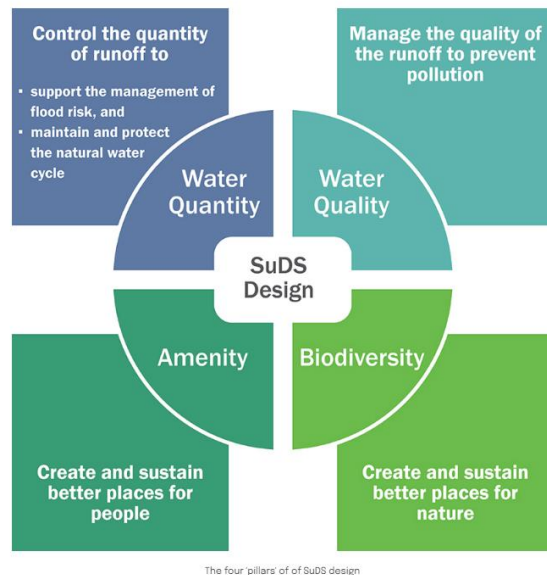

**Fig 3 – ‘4 pillars of SUDs Design**

## **6.2 Kerry County Council Development Plan (2022 – 2028)**

It is a policy of Kerry County Council to promote biodiversity, the use of SUDs, and other nature-based solutions in the design, construction, and maintenance of residential developments. (6.2.3 – *Housing for sustainable communities*)

The following Objectives regarding storm water management are cited, within the Development Plan, as follows;

*“KCDP 13-21 The improvement of sustainable drainage and reduce the risk of flooding in the urban environment in accordance with the CIRIA SuDS Manual 2015.”*

Proposed implementation; Throughout this Drainage Engineering Assessment report, design guidance refers to The SUDs Manual.

*“KCDP 13-22 It is an objective of the Council to identify opportunities for nature-based SuDs in tandem with the preparation of masterplans for urban areas and plan level Strategic Flood Risk Assessments.*

Proposed implementation ; Nature based SUDs , commonly referred to as ‘soft’ SUDs are to be incorporated into this proposed development. It will be shown, within this report, that there is no Flooding Risk associated with this proposal.

*“KCDP 13-24 Support the incorporation of Sustainable Urban Drainage Systems (SUDs) in all public and private development in urban areas. “*

Proposed implementation; Both 'hard' and 'soft' SUDs measures will be incorporated within the design and surface water management strategies, within the proposed development. It is proposed that no surface water will be discharged from the site to the existing public drainage network.

*"KCDP 13-25 Work alongside Irish Water to ensure the separation of foul and surface water drainage networks where feasible and undertake drainage network upgrades to help remove surface water misconnection and infiltration"*

Proposed implementation ; A feasibility application has been submitted to Irish Water regarding the proposed foul water drainage. The foul water drainage system, which will be completely separated from the storm water drainage system, will be designed and constructed to Irish Water Standards. It is proposed to treat all surface water on-site. A Confirmation of Feasibility has been received from Irish Water. (Appendix A).

In line with KCDP '*Storm Water Management*', the following has been considered

All SUDs components and the storm water conveyancing network has been designed with a 20% Climate Change Factor, to allow for more frequent and intense rainfall.

The SUDs design, as proposed, considers infiltration techniques via a combination of both nature-based solutions ('soft' Suds) and 'hard' suds solutions, being geo-cellular systems. The proposed design layout shows a general 'even-spread' of selected SUDs components, throughout the overall site, which replicates, as close as possible, the natural drainage processes, with final discharge to ground water and ensures groundwater recharge.

Additionally, the incorporation of nature-based SUDs solutions promotes the design philosophy of the aforementioned '4 pillars of SUDs Design'.

Should any controlled surface water flow discharge from the site be required, this will be limited to greenfield run-off rates. (see calculation report).

Various SUDs proposals, are outlined below. Included within these proposals are source control measures including permeable paving, bioretention / raingardens, tree pits, and soakaways. (cl 4.31 *Sustainable Residential Development in Urban Areas ( 2009 DoEHLG)*).

### **6.3 SUDs Methods**

A sequence of SUDs components, forming a 'management train' is to be provided, which will control flow velocities and limit pollutants within the storm water.

## **Methods of Discharge Routes Considered**

A number of discharge options have been considered for this development proposal, namely:

- Soakaways
- Attenuation
- Attenuation Ponds
- Swales
- Permeable Paving
- Infiltration Blanket
- Bioretention Areas
- Tree pits

For infiltration methods, calculated soil infiltration rates, as obtained from on-site soil testing will form the basis of design, specification, and sizing for proposed infiltration methods. , (see Soil Infiltration Testing Report).

These methods are reviewed and considered as follows;

### **Soakaways**

There is scope within the confines of the site, for a soakaway design, discharging to the underlying soil. The soil has good infiltration characteristics, ( $> 10^{-6}\text{m/s}$ ), and the water table is located at a depth  $>5\text{m}$ .

A propriety modular crate system, or similar, would be suitable. These systems have a void ratio of between 95% and 100%, depending on product selected. Some proprietary solutions also combine suitable drainage stone (MOT type 3, cl 805) with a 30% void ratio, fully enclosed by a permeable geotextile material, as part of the installation.

Given the geological assessment of the site, and noting the site area is within a '*Regionally Important Gravel Aquifer*', a suitable treatment train is crucial for the treatment of the storm water, regarding soakaways, or any infiltration method adopted. Predominantly, silt and other pollutants are most likely to enter the system via vehicular trafficked areas. (see Ground Water Protection Measures in section 6.5.3)

As part of the 'treatment train', silt traps are generally to be included, prior to discharge to the underground soakaway. Additionally, the 'above ground' rainwater system from the roofs of buildings (ie rainwater down pipes, to gullies), are to be designed as an 'open' system which will require gulley pots to act as a silt trap, to trap any debris encountered from the roof, as a 'first treatment', prior to entering a main silt trap. This water will contain a very low level of pollutants.

Drainage conveyancing pipework from the individual roof aspects will discharge into 6 No separate Soakaways, which are to be dispersed around the site. (see Conveyancing Pipe outlet Flow Summary Sheet – Appendix B). The dispersion of soakaways around the site, allows for a 'spread' of generally a uniform infiltration to the subsoil, which, along with other infiltration techniques, mimics the natural site and allows for ground water recharge throughout the extent of the site area. Locations of soakaways are to be incorporated within the proposed 'Green' areas.

Generally, water run-off from the road system are more likely to contain higher pollutant indices than roofs, (see section 6.5.2 – Water quality).

All soakaways are to be a minimum of 5m from any building foundations.

### **Attenuation tanks / crates**

There is scope within the confines of the site for surface water attenuation & discharge to the existing public storm water system, via a flow control device. (ie hydrobrake or orifice plate). Such a system would limit the discharge flow to pre-development greenfield site conditions.

Given the configuration of the site, and placement of 'green areas', various clusters of attenuation crates / tanks would have to be utilized, all interconnected, with final outlet via a flow control device. This is not deemed to be economically effective.

Additionally, the SUDS Manual recommends that infiltration viability should be given full consideration where the infiltration rate is  $10^{-6}$  or greater. The lowest infiltration rate measured on the site is  $55.8 \times 10^{-6}$ . Therefore, infiltration methods should be considered, which would allow full treatment of stormwater on site, resulting in zero discharge flow to the public sewer. Attenuation calculations show that the limiting greenfield flow rate at,  $0.2\text{L/s} = 1.4\text{L/s}$  for a 100 year return period (See Calculation Sheet), which would result in large attenuation volumes on site, translating in increased installation costs and reduced flexibility of overall design layout. Assuming adequate protection of groundwater, infiltration methods are the preferred solution compared with attenuation techniques.

### **Swales**

The incorporation of swales is possible within the site. The provision of various green areas within the site, provides suitable locations for a swale system, positioned adjacent to, and parallel with, footpaths. The 'SUDs Manual' recommends that to maximize water quality benefits, that swales are a minimum of 30m in length.

Swales maybe utilized to take stormwater run-off from the footpaths, as a primary storage and treatment.

Referring to The SUDS Manual, cl 17.4.1 – 'Swales', the following is recommended;

Swale depths are to be shallow, (<100mm depth, with a typical width of approx. 2.5m – depending on catchment area). The maintenance of swales can be easily incorporated into the general maintenance

of green areas. Flow velocities for extreme events are to be kept low ( $<1.0\text{m/s}$ ) and the design depth of water within the swale is to be  $<100\text{mm}$ , to allow for effective filtration.

Maximum flow in swale is to be limited to  $0.3\text{m/s}$ , and the residence time (length of swale/velocity) to be a minimum of 9mins, to ensure the adequate pollutant removal performance required for run-off events occurring about once a year (i.e. 1:1 year return events), as detailed in the SUDs Manual.

#### **Attenuation ponds:**

While an attenuation pond is a viable option for sustainable drainage, it is not considered an option in this circumstance, due to the relatively small size of the available 'green' areas, the unsuitability of same close to dwellings, safety considerations within a residential development, and the availability of other, more suitable options of sustainable stormwater drainage.

#### **Permeable paving**

The soil conditions as described above, and within the Soil Infiltration Testing Report, annexed to this report, are conducive to infiltration rates required for permeable paving. Permeable paving, under carparking areas, is relatively common, although cognizance must be taken within the design, to prevent potential of hydrocarbons and other pollutants, from infiltrating to the groundwater, given the classification of aquifer present within this site. However, there is a substantial subsoil layer between the stone base of the permeable paving, and the water table ( $>5\text{m}$ ). The SUDs Manual requires a minimum of  $1.0\text{m}$  of unsaturated subsoil between the invert of the infiltration base and water table. The actual unsaturated sub-soil depth is in excess of  $5\text{m}$ . Additionally, while good infiltration rates have been measured for this site (highest rate being  $122 \times 10^{-6}\text{m/s}$ ), this is not overly fast, and would filter any pollutants within the water. There also is no evidence of a fractured soil, nor any karst features within, or near the site, nor any evidence of boulders (ie  $>600\text{mm}$  dia) within the soil, all of which would limit the removal of any pollutants, due to possible localized high infiltration rates. Additionally, specialist oil-biodegrading geotextiles may be incorporated below the pavement sub-base layer, which mitigate against hydrocarbons, and other pollutants entering the soil, (Appendix C – product data for specialist geotextile proposed – Tencate 'Geoclean' aquatextile.)

The permeable pavement surface considered is of a modular paving type; a concrete block permeable paving (CBPP) is proposed, which offers an attractive differentiation of surface appearance between the road and designated carparking areas. (appendix C). 'Grasscrete' is a viable alternative option.

The general build-up of Concrete Block Permeable Paving, is as follows:

65mm concrete block paving units  
40mm of grit bedding layer (grit  $2\text{mm} < \text{dia} < 6\text{mm}$ )  
Specialist Geotextile (*Geoclean aquatextile*) membrane (appendix C)  
250mm MOT type 3 cl 805 stone (30% void)  
Specialist Geotextile (*Geoclean aquatextile*) membrane (appendix C)  
Subgrade

Note: 2No layers of the geotextile enhances the water treatment efficiency (Appendix C).

### Structural design of pavement

Due to the good infiltration characteristics of the soil, very little drainage stone is needed under the permeable paving. (See Calculations). Therefore, the minimum depth of road sub-base, is based on structural considerations, rather than storage volume requirements. From soil trial hole inspections, a firm sandy gravel soil is noted, which equates to a nominal CBR of 7% (table 20.4 SUDs manual), although from observation, CBR value is likely to be considerably more. A CBR of 7% gives a minimum required depth of subbase of 150mm, for a lightly trafficked road. The actual depth to be minimum 250mm under the perimeter permeable paved areas, to allow for occasional heavy commercial or emergency vehicles.

Permeable paving, due to the uniform infiltration per unit area, which mimics greenfield infiltration, is permitted to be constructed immediately adjacent to buildings. The type of soil within the site (sandy gravel), is ideal for this SUDs method.

### Infiltration Blanket

This is a drainage stone layer, for which the stormwater directly infiltrates to the ground. The area and depth of such a layer, is dependent on the area (ie quantity of storm water flow) of impermeable sub-catchment considered. This depth of stone provides the required attenuation requirements.

However, such systems, as is the case for soakaways, are required to be a minimum of 5.0m from foundations. The space constrictions of the site would generally limit the use of infiltration blankets, and a more 'compact' and economical solution would be provided via geo-cellular soakaways, having a higher void ratio.

.

### Bioretention areas

Bioretention areas, are small depression areas, which are generally 'dry', but are designed to temporarily fill with storm water to 150mm deep, during excessive storm water events. A sandy soil medium is overlain a drainage bed. This soil medium is usually a minimum of 300mm to 600mm depth where selected planting is considered or 1000mm depth if tree planting is proposed. Soil media and proposed planting is to be specified by a Landscape Architect.

These are a 'Soft Suds' method of storm water treatment, and can provide an ecological and attractive visual benefit, and are efficient at removing any pollutants from the water. (see section 6.5.3) Such systems can either be designed to provide direct drainage to the subsoil, via infiltration methods, or be provided with an underdrain, incorporated within the drainage bed, and connected to a remote discharge location. A 'rain garden' is a relatively small and aesthetically pleasing form of a bioretention area, that would be suitable at appropriate locations around this development.

These are effective in providing an attractive landscape feature, as well as habitat and diversity for flora and fauna.

### **Green Roofs**

Green roofs are not proposed within this development. It is not considered viable to introduce green roofs into the design of these housing units, many of which are apartments and duplexes.

### **Rain water harvesting**

It is not considered viable to provide underground tanks for the purposes of rainwater harvesting, to individual dwelling units, and would be almost impossible to provide same for apartment use. However, where possible, the provision of water butts within the rear garden of housing units could be considered. The rear sloped roof of some of the houses could discharge to water-butts, and assist with sustainable use of rainwater. However, this method is not included in the SUDS design proposal, and would be at the discretion of the end user / homeowner.

### **Tree pits**

Tree pits, or planters, can be provided, which would collect and temporarily store a small amount of stormwater run-off, and such pits could also be provided within the shallow swales, or within and around proposed footpaths. These are also a 'soft' suds method of storm water management, and are a form of bioretention. These pits would also filter any pollutants within the water. It would be desirable to incorporate such methods into the overall development, which would also have ecological benefits and improve the overall visual amenity of the area. Tree pits are proposed to treat the storm water discharge from some of the road aspect.

Silt trap gulleys may be used prior to tree pit inlet, taking a limited amount of road sub-catchment which would discharge directly to the tree pit.

Alternatively, open channel flow, straight from the road surface, can be directed into the respective tree-pits. An allowance for progressive siltation should be incorporated into the design, in the sizing of these tree-pits. This latter option is a preferred SUDs choice, incorporating 'open channel' flow into the respective pit, and removing the requirement of gulleys and pipework.

### **Petrol / Oil Interceptor**

An oil interceptor can form part of the treatment train. Typically, interceptors are used for car parks > 800m<sup>2</sup> or for 50 or more car parking spaces .

A class 1 bypass interceptor could be considered for this proposal.

However, Suds design usually avoids the use oil separators, and other sumps which are a wildlife hazard, often ineffective and expensive to maintain, in favour of more suitable, nature based solutions. (i.e Bio-retention areas), (The SUDs manual)

### **6.3.3 Recommended Suds Options for Sub-Catchment Areas**

**Roads** – discharge to a dedicated bioretention area via, a silt trap. This bioretention area would be provided with a soil medium in excess of 1.0m in depth, allowing for the provision of tree planting. The surface water ponding would be limited to 150mm deep, for storm events below 10%AEP and provided with 2No overflow pipes, directly linked to the underlain stone drainage bed, which would provide for attenuation for storm events up to 1:100 year return (1%AEP). (See section 7.4 – Bioretention Design)

Some portion of the road will also discharge into tree-pits, measuring 2.5m x 2.5m. 9No tree-pits are proposed, each accommodating a maximum of 125m<sup>2</sup> of road surface. (see section 7.5 – Tree-Pit Design)

Both the Bioretention area and tree pits provide good pollutant removal characteristics. The design of any such planar methods of infiltration should allow a factor of safety for progressive siltation to occur (see 7.4.2).

Additionally, a specialist geotextile membrane (Appendix C) would be underlain, to separate the soil media and stone, from the sub-soil, to mitigate against any hydrocarbon pollution from the road.

A minimum of 2.5m of unsaturated sub-soil would exist between the geotextile membrane, and the highest level of groundwater, which exceeds the minimum depth of 1.0m recommended within the SUDs Manual.

**Carparks** – Permeable paving, incorporating a sub-base stone layer, with a specialist geotextile material, which would prevent hydrocarbons and other pollutants entering the subsoil beneath. Additionally, the substantial depth of unsaturated soil (>5.0m) beneath the permeable paving would provide a substantial filtration system.

**Roof areas** – generally proposed to discharge to soakaways dispersed around the site. This ‘clean’ water from the roof would contain extremely low levels of pollutants. (see section 6.5.2)  
These underground soakaways, allow for useful ‘play’ areas over, and are very efficient in maximizing available space.

A bioretention area / rain garden is proposed to accommodate storm water flow from the roof of ‘Block M’. This is the proposed sheltered housing structure. This bioretention area, for this location, was selected for it’s amenity and aesthetic value, at this location, rather than a ‘soakaway’.

**Footpaths** – these sub-catchment areas are proposed to discharge to swales, or via adjacent permeable paving, or discharge to soakaways. Swales would provide a natural treatment of stormwater



## **6.2 Conveyancing System**

### **Roads and Buildings**

The conveyancing system will be PVCu pipework, laid to suitable gradients, and constructed and bedded in accordance with *BS EN 1295-1:2019 Structural Design of buried pipelines under various conditions of loading. General Requirements*.

This drainage pipework will outlet to respective soakaways or bioretention systems (rain gardens),

Some portion of the road will discharge directly to tree-pits. This will be open-channel flow, and no pipework will be required.

### **Carparking**

A direct discharge of stormwater will apply for carparking areas, directly infiltrating to the ground – there will be no drainage pipework servicing carparking areas.

The sizing and gradients of the proposed Storm water pipework is presented in Section 7.7 of this report. (also see Appendix B).

## **6.5 Storm Water Management**

### **6.5.1 Water Quantity**

#### **From Buildings;**

Storm water will be collected from the roof, via guttering, with discharge to rainwater down pipes – this above ground drainage to be designed to *BS EN 12056-3:2000, Gravity Drainage Systems Inside Buildings*. The receiving gullies are to be of the bottle type gullies (rather than P-trap Gullies); this facilitates ease of maintenance and provides of an initial removal of silt and organic deposits from the roof area.

Thereafter, the storm water is to be conveyed via 100mm dia PVCu pipes laid to a 1:60 gradient, bedded in suitable pea gravel, for a short run, linked to a larger 150mm dia pipe, via a saddle connection. This main drainage pipe will be connected either to an underground soakaway or a bioretention (rain garden) system, via a silt trap manhole, with a minimum 400mm silt trap base.

### From Roads:

Storm water from a portion of the road area, will be conveyed via 'open channel' flow directly to individual tree pits.

The gradients of the road will be such that each tree pit can accommodate up to a maximum of 110m<sup>2</sup> of road area.

The stormwater from the remainder, larger portion of the road, is to be conveyed to a detention basin area, at the 'front' of the site (south), via suitably sized PVC drainage pipes.(see Appendix B for flow rates).

### Carparking areas

Carparking areas will discharge directly to the ground, via permeable paving, laid over a stone sub-base, with direct infiltration to the ground.

Some carparking areas, will be designed to accommodate storm water run-off from adjacent footpaths.

Interception Infiltration > 5mm for all surfaces

### Attenuation for Storm Return Periods - Annual Exceedance Probability (AEP)

The storage volume for all discharge options will be designed to a 1:100 year storm event (1%AEP), prior to direct infiltration.

The conveyance pipework is normally designed to 1:10 year storm event (10%AEP). However, the section diameter of most conveyancing pipework, designed to a 10%AEP can also accommodate a 1:100 year storm event (1%AEP).

Bioretention areas and tree pits are designed to limit the surface ponding to a 150mm depth, over the soil media. An overflow pipe is then connected to an underlain attenuation (stone drainage bed, or geo-cellular system) designed to accommodate a 1:100 year storm event.

The detention basin is designed to be generally 'dry' with surface water ponding occurring in the basin at 1:100 year return periods (1% AEP). The maximum designed depth is 170mm, and a 300mm freeboard also is provided.

The occurrence and depth of designed surface ponding within Bioretention areas (raingardens and tree pits), and the detention basin is a function of the inflow rate into the respective systems, which in turn is dependent on rainfall intensity, sub-catchment area, the time duration of the rainfall, and the storm return period. These are summarized and tabulated in appendix D. The determining calculations are contained with the calculation sheet document.

## 6.5.2 Water Quality

The following Pollution hazard indices, replicated from table 26.2 – SUDS manual, is shown below.

| Land use                                                                                                                                                                                                                                                                                                               | Pollution hazard level | Total suspended solids (TSS) | Metals                                                                     | Hydro-carbons    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------|----------------------------------------------------------------------------|------------------|
| Residential roofs                                                                                                                                                                                                                                                                                                      | Very low               | 0.2                          | 0.2                                                                        | 0.05             |
| Other roofs (typically commercial/ industrial roofs)                                                                                                                                                                                                                                                                   | Low                    | 0.3                          | 0.2 (up to 0.8 where there is potential for metals to leach from the roof) | 0.05             |
| Individual property driveways, residential car parks, low traffic roads (eg cul de sacs, homezones and general access roads) and non-residential car parking with infrequent change (eg schools, offices) ie < 300 traffic movements/day                                                                               | Low                    | 0.5                          | 0.4                                                                        | 0.4              |
| Commercial yard and delivery areas, non-residential car parking with frequent change (eg hospitals, retail), all roads except low traffic roads and trunk roads/motorways <sup>1</sup>                                                                                                                                 | Medium                 | 0.7                          | 0.6                                                                        | 0.7              |
| Sites with heavy pollution (eg haulage yards, lorry parks, highly frequented lorry approaches to industrial estates, waste sites), sites where chemicals and fuels (other than domestic fuel oil) are to be delivered, handled, stored, used or manufactured; industrial sites; trunk roads and motorways <sup>1</sup> | High                   | 0.8 <sup>2</sup>             | 0.8 <sup>2</sup>                                                           | 0.9 <sup>2</sup> |

The following is applicable to this proposed development.

### **Residential Roofs:**

Pollution hazard level: 'very low'  
 Total Suspended Solids (TSS) = 0.2  
 Metals = 0.2  
 Hydrocarbons = 0.05

### **Access road and carpark and individual property driveways. (+ footpaths)**

Pollution hazard level: 'low'  
 Total Suspended Solids (TSS) = 0.5

Metals = 0.4  
Hydrocarbons = 0.4

The pollution hazard level for this proposal is between 'very low' and 'low'

### 6.5.3 Ground water protection measures:

**Roof drainage:** Gulley pots to provide for silt entrapment, prior to entering main silt trap manhole. These receiving gullies are to be of the bottle type gullies (rather than P-trap Gullies); this facilitates ease of maintenance and provides of an initial removal of silt and organic deposits from the roof area.

**Carpark Areas:** Filter medium provided by 'grit' layer under permeable paving. A specialist geotextile is also proposed, with hydrocarbon / oil removal characteristics, equivalent to a class 1 oil interceptor. (appendix C).

**Roads :** Overall, the carparking /road area exceeds 800m<sup>2</sup> in area which provide for more than 50 cars. Therefore, an oil separator would normally be provided. However, as cited in the 'SUDS manual', it is preferred that a natural based solution be used, in place of an oil separator, therefore bioretention areas and tree pits have been incorporated into the drainage design, to accommodate stormwater run-off from the road.

Suds mitigation indices for discharges to groundwater\* , as per CIRIA 753, (table 26.4 – Suds manual),

| <b>TABLE 26.4 Indicative SuDS mitigation indices for discharges to groundwater</b>                                                                                                                                                                                                                                                          |  |                                                                                                                                                                       |               |                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| <b>Characteristics of the material overlying the proposed infiltration surface, through which the runoff percolates<sup>1</sup></b>                                                                                                                                                                                                         |  | <b>TSS</b>                                                                                                                                                            | <b>Metals</b> | <b>Hydrocarbons</b> |
| A layer of dense vegetation underlain by a soil with good contaminant attenuation potential <sup>2</sup> of at least 300 mm in depth <sup>3</sup>                                                                                                                                                                                           |  | 0.6 <sup>4</sup>                                                                                                                                                      | 0.5           | 0.6                 |
| A soil with good contaminant attenuation potential <sup>2</sup> of at least 300 mm in depth <sup>3</sup>                                                                                                                                                                                                                                    |  | 0.4 <sup>4</sup>                                                                                                                                                      | 0.3           | 0.3                 |
| Infiltration trench (where a suitable depth of filtration material is included that provides treatment, ie graded gravel with sufficient smaller particles but not single size coarse aggregate such as 20 mm gravel) underlain by a soil with good contaminant attenuation potential <sup>2</sup> of at least 300 mm in depth <sup>3</sup> |  | 0.4 <sup>4</sup>                                                                                                                                                      | 0.4           | 0.4                 |
| Constructed permeable pavement (where a suitable filtration layer is included that provides treatment, and including a geotextile at the base separating the foundation from the subgrade) underlain by a soil with good contaminant attenuation potential <sup>2</sup> of at least 300 mm in depth <sup>3</sup>                            |  | 0.7                                                                                                                                                                   | 0.6           | 0.7                 |
| Bioretention underlain by a soil with good contaminant attenuation potential <sup>2</sup> of at least 300 mm in depth <sup>3</sup>                                                                                                                                                                                                          |  | 0.8 <sup>4</sup>                                                                                                                                                      | 0.8           | 0.8                 |
| Proprietary treatment systems <sup>5, 6</sup>                                                                                                                                                                                                                                                                                               |  | These must demonstrate that they can address each of the contaminant types to acceptable levels for inflow concentrations relevant to the contributing drainage area. |               |                     |

Notes

### Mitigation Indices.

Referring to the above table 26.4 Suds Manual, the Mitigation indices for discharges to groundwater are as follows;

A soil with good contaminant attenuation potential at and least 300mm of soil depth.

### Mitigation Indices, considering soakaways from roofs

|                              |       |                      |
|------------------------------|-------|----------------------|
| Total Suspended Solids (TSS) | = 0.4 | > 0.2, therefore OK  |
| Metals                       | = 0.3 | > 0.2, therefore Ok  |
| Hydrocarbons                 | = 0.3 | > 0.05, therefore OK |

Sub-soil provided > 2.5m depth (ie > 300mm required for above mitigation indices).

### Mitigation Indices, considering Permeable pavements for car parks

|                              |       |                     |
|------------------------------|-------|---------------------|
| Total Suspended Solids (TSS) | = 0.7 | > 0.5, Therefore Ok |
| Metals                       | = 0.6 | > 0.4, Therefore OK |
| Hydrocarbons                 | = 0.7 | > 0.4 Therefore, Ok |

Sub-soil provided > 5.0m depth (ie > 300mm required for above mitigation indices). Also, 2No layers of specialist geotextile, (Selected Specification type: *Tencate Geoclean aquatextile*) incorporated within the pavement build-up.

### Mitigation Indices, considering bioretention area for roads.

|                              |       |                     |
|------------------------------|-------|---------------------|
| Total Suspended Solids (TSS) | = 0.8 | > 0.5, therefore Ok |
| Metals                       | = 0.8 | > 0.4, therefore OK |
| Hydrocarbons                 | = 0.8 | > 0.4 Therefore Ok  |

Sub-soil provided > 2.5m depth (ie > 300mm required for above mitigation indices). Also, layer of specialist geotextile, (Selected Specification type: *Tencate Geoclean aquatextile*) incorporated around underlain attenuation storage.

Mitigation Indices, considering Tree-pits for roads.  
(tree pits being a form of bioretention application)

|                              |                           |
|------------------------------|---------------------------|
| Total Suspended Solids (TSS) | = 0.8 > 0.5, therefore Ok |
| Metals                       | = 0.8 > 0.4, therefore OK |
| Hydrocarbons                 | = 0.8 > 0.4 Therefore Ok  |

Additionally, a specialist geotextile material, (Selected Specification type: *Tencate Geoclean aquatextile*) surrounding the modular crates soakaway is to be provided, to mitigate against pollution. This is a two layer aquatextile materials which traps and biodegrades oil from run-off water.

Note: The above specified geotextile has a maximum residual hydrocarbon content in the percolating water < 2mg/L. This is a better performance than a Class 1 oil Separator, (5mg/L – EN858-1:2002) (see *Tencate Geoclean aquatextile datasheet in appendix C*)

All infiltration methods must have a minimum of 1.0m of unsaturated sub-soil, between the invert of the infiltration base and the acquifer. Actual minimum depth between invert of infiltration base and water table > 2.5m.

Bioretention applications (including rain gardens) and tree pits have a significant contribution throughout all 4 pillars of Suds (water quality, water quantity, amenity and biodiversity) ( *Greening and Nature based Suds for Active Travel Schemes- National Transport Authority*)

The tree pits provide good gross solid and sediment removal, via filtration, and have been designed to accommodate same.

## **6.6 Operation and Maintenance**

### **Management of Surface Water Infiltration System**

All Suds systems, including infiltration systems, require regular maintenance and management, to ensure continuing operation to the required design performance standards.

The following regimes are to be implemented as per recommendations – CIRIA SuDS 2016

#### **Maintenance and Pollution Control**

##### **Soakaways (Modular Crate System)**

Silt is to be prevented from entering the surface waste-water drainage system by the use of trapped bottle gullies as a first control, and then to a common silt trap manholes as a 2<sup>nd</sup> control.

It is proposed to use proprietary crates (Aquacell Core – R, or equal approved). These crates provide a 95% void ratio, provision for internal inspection, and are suitable for both landscape and trafficked areas.

These are structural crates, typically with a vertical loading capability of 66.9tonnes / m2 and a lateral loading capability of 12.3 tonnes /m2.

Assuming correct installation, the typical lifespan of these modular crate soakaways is typically between 60 years to 100 years. Ref: Wavin product literature).

The maintenance schedule for the soakaways, is to be as follows,

| <b>Maintenance Schedule</b>   | <b>Required Action</b>                                                                                                                                                    | <b>Frequency</b>                                                 |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| <b>Regular Maintenance</b>    | Inspect for sediment and debris in pre-treatment components (silt traps), and within inspection chambers and AJ's<br><br>Cleaning of gutters and any filters on downpipes | Annually<br><br>Annually, or as required                         |
| <b>Occasional Maintenance</b> | Remove sediment and debris from pre-treatment components.                                                                                                                 | As required                                                      |
| <b>Remedial Actions</b>       | Reconstruct soakaway and/or replace or clean void fill if performance deteriorates or failure occurs<br><br>Replacement of geotextile                                     | As required<br><br>As required                                   |
| <b>Monitoring</b>             | Inspect silt traps and note rate of sediment accumulation.<br><br>Check soakaway to ensure emptying is occurring                                                          | monthly in first year then annually, as required<br><br>Annually |

**Maintenance responsibility: Management Company and KCC when taken in charge.**

### **Permeable Paving**

It is proposed to install interlocking concrete block (CBPP) as the permeable paving. (Tobermore, or equal approved)

Assuming correct installation, these type of Suds methods typically have a life span of between 25 years to 50 years. Tobermore, offer a 25 year structural integrity guarantee on their CBPP products.

The specialist geotextile material (Tencate Aquatextile Geoclean, or equal approved), is designed for long term no-maintenance performance, and has a lifespan in excess of 50 years.

The maintenance schedule for permeable paving is to be as follows,

| <b>Maintenance Schedule</b>   | <b>Required Action</b>                                                                                                                                           | <b>Frequency</b>                                                                                                                                                                                                                                       |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Regular Maintenance</b>    | Brushing (Standard cosmetic sweep over whole surface)                                                                                                            | Once a year, after leaf fall or reduced frequency as required. Based on site-specific observations of clogging or manufacturers recommendations – attention to particular areas where water runs onto pervious surface from adjacent impervious areas. |
| <b>Occasional Maintenance</b> | Stabilize and mow contributing and adjacent areas. Removal of weeds or management using glyphosate applied direct to weeds by an applicator rather than spraying | As required - once a year on less frequency used area                                                                                                                                                                                                  |



|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |
| <b>Remedial Actions</b> | <p>Remediate any landscaping which through vegetation maintenance or soil slip has been raised to within 50mm of the level of the paving.</p> <p>Remedial works to any depressions, rutting and cracked or broken blocks considered detrimental to the structural performance or a hazard to users, and remedial lost jointing material</p> <p>Rehabilitation of surface and upper substructure by remedial sweeping. Replacement of geotextile</p> | <p>As required</p> <p>Every 10 to 15 years or as required if infiltration performance is reduced due to significant clogging</p> |
| <b>Monitoring</b>       | Initial Inspection                                                                                                                                                                                                                                                                                                                                                                                                                                  | monthly in first year then annually, as required                                                                                 |
|                         | Inspect for evidence of poor operation and/or weed growth - if required, take remedial action                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                  |
|                         | Inspect silt accumulation rates and establish appropriate brushing frequencies                                                                                                                                                                                                                                                                                                                                                                      | Annually                                                                                                                         |
|                         | Monitor inspection chambers                                                                                                                                                                                                                                                                                                                                                                                                                         | Annually                                                                                                                         |

**Maintenance Responsibility: Homeowners for carparking spaces within private curtilage Management Company and KCC when 'taken in charge' for common carparking spaces.**

### **Tree pits**

Assuming correct installation, tree pits systems typically have a life span of approx 25 years plus.  
The maintenance schedule for the tree pits is to be as follows,

| <b>Maintenance Schedule</b>   | <b>Required Action</b>                                                                                                                                  | <b>Frequency</b>                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| <b>Regular Maintenance</b>    | Remove Litter and debris<br><br>Manage Other Vegetation and remove nuisance plants<br><br>Inspect Inlets and outlets                                    | Monthly, or as required                                            |
| <b>Occasional Maintenance</b> | Check Tree Health and manage tree appropriately<br><br>Remove all silt build-up from the inlets and surface and replace mulch as necessary<br><br>Water | Annually, or as required<br><br>As required, or periods of drought |
| <b>Remedial Actions</b>       | Replace tree / pit if severely damaged / diseased                                                                                                       | As required                                                        |
| <b>Monitoring</b>             | Inspect silt accumulation rates and establish appropriate removal frequencies                                                                           | Half yearly                                                        |

**Maintenance Responsibility: Management Company / KCC when 'taken in charge'**

## **Bioretention Systems**

The lifespan of a bioretention system is approx 25years to 50 years. The specialist geotextile material (Tencate Aquatextile Geoclean, or equal approved) within the system having a lifespan in excess of 50 years.)

The maintenance schedule is to be as follows,

| <b>Maintenance Schedule</b>   | <b>Required Action</b>                                                                                                                                                                                                                                                                                                                                                                                                    | <b>Frequency</b>                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| <b>Regular Maintenance</b>    | <p>Inspect infiltration surfaces for silting and ponding , record de-watering time of the facility, and assess standing water levels in underdrain to determine maintenance is necessary.</p> <p>Check operation of underdrains by inspection of flows after rain</p> <p>Access plants for disease infection, poor growth, invasive species , and replace as necessary</p> <p>Inspect inlets and outlets for blockage</p> | Quarterly                                                      |
| <b>Occasional Maintenance</b> | <p>Check Tree Health and manage tree appropriately</p> <p>Infill any holes or scour in the filter medium, improve erosion protection if required</p> <p>Remove all silt build-up from the inlets and outlets</p>                                                                                                                                                                                                          | Annually, or as required<br>As required, or periods of drought |

|                         |                                                                               |                                          |
|-------------------------|-------------------------------------------------------------------------------|------------------------------------------|
| <b>Remedial Actions</b> | Remove and replace filter medium and vegetation                               | As required, but likely to be > 20 years |
| <b>Monitoring</b>       | Inspect silt accumulation rates and establish appropriate removal frequencies | Half yearly                              |

**Maintenance Responsibility: Management Company / KCC when 'taken in charge'**

### **Detention basin**

The lifespan of a Detention system is approx 25years to 50 years. The specialist geotextile material (Tencate Aquatextile Geoclean, or equal approved) within the system having a lifespan in excess of 50 years.

The maintenance schedule is to be as follows,

| <b>Maintenance Schedule</b> | <b>Required Action</b>                                                                                                                                                                                      | <b>Frequency</b>        |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Regular Maintenance</b>  | Remove Litter and debris<br><br>Cut grass /remove weeds<br><br>Manage other vegetation and remove nuisance plants<br><br>Inspect Inlets and outlets, check ponding / blockages. Check for silt accumulation | Monthly, or as required |

|                               |                                                                                                                                                                                                                                       |             |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
|                               | <p>Inspect vegetation coverage</p> <p>Inspect banksides, structures, pipework</p>                                                                                                                                                     |             |
| <b>Occasional Maintenance</b> | <p>Re-seed areas of poor vegetation growth, alter plant types to suit vegetation growth if required</p> <p>Remove all silt build-up from the inlets and outlets</p>                                                                   | Annually    |
| <b>Remedial Actions</b>       | <p>Repair erosion or other damage other damage by re-turfing or re-seeding</p> <p>Re-level uneven surfaces and re-instate design levels</p> <p>Repair inlets / outlets</p> <p>Relevel uneven surfaces and reinstate design levels</p> | As required |
| <b>Monitoring</b>             | <p>Inspect silt accumulation rates and establish appropriate removal frequencies</p>                                                                                                                                                  | Half yearly |

**Maintenance Responsibility: Management Company / KCC when 'taken in charge'**

## **7.0 Stormwater Design**

### **7.1 Calculation Procedure for the Design of Soakaway and Infiltration Methods**

(refer to calculation sheet document)

Software: TEKLA TEDDS version 2020

#### **7.1.1 Hydraulic Flow Design Parameters**

The rainfall intensity is taken from the Wallingford Procedure.

The rainfall intensities over various time durations are considered in the calculations.  
Rainfall Intensity calculations are provided in the attached calculation sheets.

A minimum of 10 year storm return period is taken for conveyancing of storm water, although general common pipe sizes will cater for a 100 year storm period (see pipe conveyancing section ). A 20% climate change factor is considered.

From Rainfall Return Period Data (Met Eireann), for killarney Location (See Calculation Sheets)

M5-60 = 18.9

Ratio r: = 0.21

#### **7.1.2 Calculation Method:**

Soakaway sizing to BRE digest 365 – Soakaway Design.

Soil infiltration rates have been determined from on-site testing to BRE365 Soakaway design guidelines (See soil testing infiltration report).

Parameters considered:

100 year storm return period for infiltration components (Soakaways, permeable paving, detention basin, treepits and bioretention system)

The maximum time period for emptying to half volume of all infiltration methods is to be 24hrs

Conveyance pipework is designed to 1:10 year. (although can accommodate 1:100 year events)

20% climate change factor considered. (KCDP and *Greater Dublin Regional Code of Practice for Drainage Works*)

Interception Infiltration taken typically considered as 5mm for all surfaces

However, for run-off calculations, this is not considered for impermeable surfaces, and the Coefficient of Volumetric run-off is taken a 1.0. ( Percentage of Impermeable area PIMP, taken as 100%). (Sewers for Adoption 7<sup>th</sup> Edition)

Designated Drainage Stone: Void ratio (min 30%) (MOT type 3 (clause 805 - no fines).

Proprietary 'crates' or tanks, Void ratio taken as 95% for the purposes of calculation.

## **7.2 Sub-catchment Areas considered:**

See 'Sub-Catchment Areas' cited in Appendix B for a detailed breakdown of all respective areas.

In summary, the following total areas are considered; (*An allowance has been made for 'urban creep' and minor amendments to areas of 10% )*

### **Impermeable areas**

| <b><u>Buildings</u></b> |   | <b><u>Actual area</u></b>  | <b><u>Area(10% urban creep)</u></b> |
|-------------------------|---|----------------------------|-------------------------------------|
| Block A                 | = | <u>515.5m<sup>2</sup></u>  | <b>567.05m<sup>2</sup></b>          |
| Block B                 | = | <u>292.4m<sup>2</sup></u>  | <b>321.64m<sup>2</sup></b>          |
| Block C                 | = | 515.5m <sup>2</sup>        |                                     |
| Block D                 | = | 515.3m <sup>2</sup>        |                                     |
| Block E                 | = | 311.4m <sup>2</sup>        |                                     |
| Block F                 | = | 718.5m <sup>2</sup>        |                                     |
| Block J                 | = | 413.6m <sup>2</sup>        |                                     |
| Subtotal                | = | <u>2474.3m<sup>2</sup></u> | <b>2721.7m<sup>2</sup></b>          |
| Block G                 | = | <u>413.9m<sup>2</sup></u>  | <b>455.3m<sup>2</sup></b>           |
| Block H                 | = | 509.5m <sup>2</sup>        |                                     |
| Block K                 | = | 286.1m <sup>2</sup>        |                                     |
| Subtotal                | = | <u>795.6m<sup>2</sup></u>  | <b>875.2m<sup>2</sup></b>           |
| Block L                 | = | 363.7m <sup>2</sup>        | <b>400.1m<sup>2</sup></b>           |

|                    |   |                            |                            |
|--------------------|---|----------------------------|----------------------------|
| Block M            | = | 657.0m <sup>2</sup>        | <b>722.7m<sup>2</sup></b>  |
| <b>Total roofs</b> | = | <b>5512.4m<sup>2</sup></b> | <b>6063.6m<sup>2</sup></b> |

|                        |   |                            |  |
|------------------------|---|----------------------------|--|
| Roads, total area      | = | 3302.4m <sup>2</sup>       |  |
| Footpaths              | = | 2171.8m <sup>2</sup>       |  |
| Rear access paths      | = | 1009.6m <sup>2</sup>       |  |
| Bin and/or Bike Stores | = | 360m <sup>2</sup>          |  |
| <b>Total</b>           | = | <b>6843.8m<sup>2</sup></b> |  |

#### **Permeable Areas**

|               |   |                            |  |
|---------------|---|----------------------------|--|
| Carparking    | = | 3821.5m <sup>2</sup>       |  |
| Green Areas** | = | 6162.2m <sup>2</sup>       |  |
| <b>Total</b>  | = | <b>9983.7m<sup>2</sup></b> |  |

\*\*These areas are considered to be 'grassed' or have permeable coverings, and have natural infiltration given the soil characteristics.

**Overall total Site Area = 22339.9m<sup>2</sup> (c. 2.23Ha)**

### **7.3 Soakaway Design**

It is proposed that the storm water from the roofs, in general, are treated by a series of 6No underground Soakaways, comprising of proprietary modular crates. This roof water has minimal potential pollutants (see pollution section). The exception to this, is the roof outflow from 'Block M', which will be treated by a Bioretention area for ecological and aesthetic purposes.

In summary, the following applies;  
(Please see calculation sheet document, and Appendix D)

Refer to drawings for sub-catchment designations.

#### **Block A Soakaway No 1**



Design Impermeable area = 567.05m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 32.67m<sup>3</sup>, actual Volume = 33.86m<sup>3</sup>

Size of Soakaway = 28m<sup>2</sup> ( 9.0m x av. 3.3m) x 1.2m deep.

Time for soakaway to reduce by half = 5hr 13min 41s < 24hrs therefore Ok

### **Block B Soakaway No 2**

Design Impermeable area = 321.64m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 16.97m<sup>3</sup>, actual Volume = 18.24m<sup>3</sup>

Size of Soakaway = 4.0m x 4.0m x 1.2m deep.

Time for soakaway to reduce by half = 4hr 10min 31s < 24hrs therefore Ok

### **Blocks C, D, E, F and J, Soakaway No 3**

Design Impermeable area = 2721.7m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 211.18m<sup>3</sup>, actual Volume = 223.44m<sup>3</sup>

Size of Soakaway = 14.0m x 14.0m x 1.2m deep.

Time for soakaway to reduce by half = 14hr 50min 42s < 24hrs therefore Ok

### **Block G Soakaway No 4**

Design Impermeable area = 455.3m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 17.54m<sup>3</sup>, actual Volume = 22.80m<sup>3</sup>

Size of Soakaway = 5.0m x 4.0m x 1.2m deep.

Time for soakaway to reduce by half = 1hr 50min 46s < 24hrs therefore Ok

### **Block H and K Soakaway No 5**

Design Impermeable area = 875.2m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 54.21m<sup>3</sup>, actual Volume = 61.56m<sup>3</sup>

Size of Soakaway = 12.0m x 4.5m x 1.2m deep.

Time for soakaway to reduce by half = 6hr 28min < 24hrs therefore Ok

### **Block L Soakaway No 6**

Design Impermeable area = 400.1m<sup>2</sup> (inc 10% Urban Creep)

Required Volume = 22.56m<sup>3</sup>, actual Volume = 22.8m<sup>3</sup>

Size of Soakaway = 5.0m x 4.0m x 1.2m deep.

Time for soakaway to reduce by half = 4hr 56min 2s < 24hrs therefore Ok

### **Block M**

Design Impermeable area = 722.7m<sup>2</sup> (inc 10% Urban Creep)

See bioretention section, below.

## **7.4 Bioretention Design**

The proposed 'raingardens' and the 'tree pits' will be considered as Bioretention Suds Design.

It is proposed that the general design of the bioretention systems will be to provide raingardens and tree pits as part of a nature based, 'soft SUDs' solution, to accommodate storm water from the proposed road network.

The first flush volume of rainwater, of contributing Sub-catchment areas, will be accommodated by the raingarden / tree-pit, comprising a designed soil medium, including surface ponding of same up to 150mm depth.

Storm events and rainfall intensities which will exceed the 150mm limiting depth within the bioretention area, will overflow to an underlain attenuation system, constructed either from proprietary modular crates and / or drainage stone, with full infiltration to the sub-soil under. This attenuation volume, combined with the bioretention area, will cater for rainfall intensities of up to 1%AEP, with a time taken to reduce the water volume by half, to less than 24hrs. A 20% climate change factor will be applied to all storm water calculations.

The following is considered;

### **General Construction of Bioretention area No 1 , Sub-catchment: Block M**

Soil medium: 600mm depth (see below)

Proprietary modular crates: 2No layers of 1000mm x 500mm x 400mm depth, void ratio = 0.95 ('Aquacel Crates')

A final outlet drainage pipe, accommodating storm water from the relevant sub catchment, will discharge into the bioretention area. This outlet pipe will be provided with a protective 'grill' with a selected stone surround, to landscape architects specifications, so as to provide erosion protection, within the rain garden areas.

The inflow velocity, from the inlet pipe to the bioretention area is to be low (<1.5m/s for a 1:100 year event). Flow should not 'scour' the bioretention surface and should be uniformly distributed over the full filter media surface. The selection and placement of stone around the inlet pipe will impede flow velocity, and create a 'spread' of water flow.

#### **7.4.1 Bioretention / Tree Pits Soil Medium**

The soil medium will be imported, to the specifications and composition of the Landscape architect.

The soil media depth for Bioretention area 1, serving the sub-catchment area of Block M, is to be 600mm depth, and is suitable for planting of suitable vegetation, to landscape architect's specifications.

The soil media depth for Bioretention area 2, serving the sub-catchment area of the partial road, is to be 1000mm depth, and is suitable for planting vegetation, including small trees, to landscape architect's specifications.

The soil media depth for Bioretention 'Tree-pit' units, serving the sub-catchment area of partial road areas up to 110m<sup>2</sup> /tree pit, is to be 1400mm depth, with a minimum volume of 8m<sup>3</sup>, and is suitable for planting small trees (<5m) to landscape architects specifications.

The saturated hydraulic conductivity of the soil medium is to be 300mm/hr – to be checked in-situ using single ring infiltration test method to BS EN ISO 22282-5:2012. (Geotechnical Investigation and testing. Geohydraulic testing – infiltrometer tests).

The porosity of the soil > 30% when tested to BS1377-2-1990 (*Methods of test for soils for Civil Engineering purposes classification tests and determination of geotechnical properties*). This porosity (ie 30%) is referred to in Suds Manual cl 18.9.2 for bioretention filter media.

Void ration,  $e = n / (1-n)$  (n = porosity)

Therefore, void ration considered, for the bioretention soil medium =  $0.3 / (1 - 0.3) = 0.43 = 43\%$ .

A factor of safety is to be applied to the soil medium infiltration rate of 300mm /hr (i.e.  $8.333 \times 10^{-5}$  m/s). See section 7.4.1.1 below.

#### **7.4.2 Siltation Effects on Infiltration performance.**

A build-up of silt, over time, can result in a reduced infiltration capacity of the system, with a potential consequence of the exceedance of the designed attenuation volume. This generally effects plane infiltration systems, which have negligible 'vertical' sides, and a build-up of silt, at the bottom of the base area, may 'clog' the infiltration plane. This may apply to the bioretention areas at the junction between the ponding area and the soil media.

Additionally, where infiltration systems are not provided with pre-treatment for silt removal, then siltation of the system can also occur. This may apply to the tree pits, whereby storm water flow from the road, is directed, via 'open channel flow, to the relevant tree pit.

In order to mitigate against possible siltation, a factor of safety should be applied to the infiltration rate, depending on the size of the area to be drained and the result of a 'consequence of failure', as per Table 25.2, Suds manual, extracted below;

Note; these factors of safety are not applied to 3-dimensional infiltration systems, designed to BRE (1991), (eg soakaways), as the bottom of the base is ignored within the BRE calculation method, and any deposit of silt at the bottom, will have negligible effect.

| <b>TABLE 25.2 Suggested factors of safety, F, for use in hydraulic design of infiltration systems (designed using Bettess (1996). Note: not relevant for BRE method)</b> |                                   |                                                                                          |                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Size of area to be drained</b>                                                                                                                                        | <b>Consequences of failure</b>    |                                                                                          |                                                                                         |
|                                                                                                                                                                          | <b>No damage or inconvenience</b> | <b>Minor damage to external areas or inconvenience (eg surface water on car parking)</b> | <b>Damage to buildings or structures, or major inconvenience (eg flooding of roads)</b> |
| < 100 m <sup>2</sup>                                                                                                                                                     | 1.5                               | 2                                                                                        | 10                                                                                      |
| 100–1000 m <sup>2</sup>                                                                                                                                                  | 1.5                               | 3                                                                                        | 10                                                                                      |
| > 1000 m <sup>2</sup>                                                                                                                                                    | 1.5                               | 5                                                                                        | 10                                                                                      |

**Factors of safety to be applied to soil infiltration rate (not included for soakaway design to BRE365, as this method assumes base layer already 'silted')**

#### **7.4.3 Bioretention Attenuation Calculations**

(refer to Appendix D and calculation document)

The infiltration rate of the soil medium is taken as = 300mm/hr

The required storage, for a given storm duration, is given thus;

Storage ponding attenuation volume,  $S = (V1-V2) \times t$   
(limited to a depth of 150mm)

Where:

V1 = Max Surface Run-off from sub-catchment, dependent on rainfall time duration (L/s)  
V2 = Max discharge rate (ie soi. infiltration take as soil infiltration rate = 300mm/hr) (L/s)  
t = Storm duration (s)

Rainfall Intensities are considered at various storm durations and varying attenuation storage requirements, at return periods of 1:2 years, 1:10 years and 1:100 years, utilizing a 20% climate change factor.

Attenuation storage components will consist of;

- (i) surface water ponding within the Bioretention area, limited to 150mm depth
- (ii) Soil medium
- (iii) Overflow attenuation crate storage or drainage stone, infiltrating to subsoil

In summary,

Sub-catchment Area considered = 722m<sup>2</sup> (including urban creep)  
PIMP = 100%

Plan area of bioretention area = 13.3m x 3.0m = 39.9m<sup>2</sup> on plan.

#### **Attenuation / storage calculation**

The bioretention area is to be designed at a 1:100 storm return event (1% AEP), for a surface flow over a maximum bioretention area of 39.9m<sup>2</sup>. The surface ponding depth will be limited to 150mm, and an overflow pipe(s) is to be provided for any exceedance of this 150mm maximum depth. Direct infiltration through the soil medium, and either an underlain bed of drainage stone, or modular crate system, through to the subsoil, is proposed. A specialist geotextile material (tencate geoclean aquatextile, or equal approved), will laid under, and around, the underlain attenuation areas, forming 2No layers of the geotextile. These layers (soil medium, and stone or crate system) will provide attention, prior to infiltration.

#### **Overall attenuation / storage**

Required storage = 27.22m<sup>3</sup> ((1:100year at 2hr duration – Appendix D )

Storage provided;

- 1. Surface ponding depth = 150mm void ratio = 100%
- 2. Soil media depth = 600mm, void ratio = 43%
- 3. Modular Crates = 800mm, void ratio = 95%

Volume of storage within crate layer = 13.3m x 3m x 0.8m x 0.95 = 30.32m<sup>3</sup>

Volume of storage within soil layer = 13.3m x 3m x 0.6m x 0.43 = 10.29m<sup>3</sup>

Volume of storage from surface ponding =  $13.3\text{m} \times 3.0\text{m} \times 0.15\text{m} = 5.99\text{m}^3$

Total storage provided =  $46.60\text{m}^3 > 27.22\text{m}^3$ , therefore OK.

Time taken to discharge to half volume ( $13.61\text{m}^3$ ) =  $8.42\text{hrs} < 24\text{hrs}$ , therefore OK.

### **Surface ponding Calculation**

Infiltration rate of soil media =  $8.33 \times 10^{-5} \text{ m/s}$  (300mm/hr, to be prescribed)

As this bioretention area is considered to be a 'plane' infiltration system, a factor of safety is applied to the infiltration rate over the plane of the soil medium base.

Referring to section 7.4.1.1 Siltation Effects on Infiltration performance (above);

Factor of safety to be applied = 1.5 (table 25.2 Suds Manual), the drained area is  $722\text{m}^2$ , and given the location of this rain garden, the consequences of failure is such that no damage or inconvenience would be caused.

Factored Infiltration rate of soil media =  $(8.33 \times 10^{-5} \text{ m/s}) / 1.5 = 5.56 \times 10^{-5} \text{ m/s}$

Rainfall intensity, and therefore storm water inflow to the system, is considered at varying intervals from 5min to 24hrs.

The excess volume of water, that cannot be infiltrated via the soil medium, up to a 150mm surface ponding depth, is to be discharged via overflow pipes, to the attenuation modular crates, beneath the soil medium.

### **Storm return periods and rainfall intensities for Bioretention Area 1 - Block M Summary:**

Overall volume of proposed bioretention area, including overflow to modular crate system is satisfactory up to 1%AEP, (1:100 return period), utilizing overflow pipes, when the infiltration rates of the soil medium is insufficient.

No overflow is required for all storm durations up to 50% AEP

Overflow is required for storm durations of at 10%AEP, from 10min to 2hr storm durations

Overflow is required for storm durations of at 1%AEP, at from 5mins to 6hr storm durations

A full analysis is given in Appendix D.

## 7.5 Detention Basin Design

### General Construction of Bioretention area No 2 , Sub-catchment: Partial Rd

Soil medium: 720mm depth

Proprietary modular crates: 2No Layer of 1000mm x 500mm x 400mm depth, void ratio = 0.95 ('Aquacel Crates')

Drainage stone: 200mm cl 803 stone, void ratio = 0.3.

Geotextile: 'Tencate' Geoclean Aquatextile, 2No layers.

Sub-catchment Area considered = 2628m<sup>2</sup>

PIMP = 100%

Plan area of bioretention area = 12.0m x 12.0m

### Attenuation / storage calculation

This dry detention area is to be designed at a 1:100 storm return event (1% AEP), for ponding to occur, limited to 170mm deep, over 144m<sup>2</sup>, within the detention basin. A freeboard of 300mm is provided within the basin. The inlet pipe is directed to the underground modular crate system, which infiltrates through the 200mm stone base, and through the existing soil. A specialist oil-degrading geotextile material is to be installed under, and around, the stone sub-base at the bottom, and around the vertical sides of the detention basin build-up.

During time of high rainfall intensity or duration, the crates, and soil medium, act as attenuation storage, prior to infiltration (see calculations in Appendix D). Additionally, provision is made for ponding, up to 170mm depth, within the detention basin. at 1% AEP storm durations.

### Overall attenuation / Storage

The total storage depth of this raingarden, is as follows;

1. Soil media depth = 720mm, void ratio = 43%
2. Depth of Drainage crates = 0.8m, void ratio = 95%
3. Depth of Drainage stone = 0.2m, void ratio = 30%

Volume of storage within Drainage stone layer = 12m x 12m x 0.2m x 0.3 = 8.64m<sup>3</sup>

Volume of storage within crate layer = 12m x 12m x 0.8m x 0.95 = 109.44m<sup>3</sup>

Volume of storage within soil layer = 12m x 12m x 0.72m x 0.43 = 44.58m<sup>3</sup>

Total Storage provided below base of basin = 162.66m<sup>3</sup>

There is an additional provision of storage as surface water ponding, up to 170mm depth, within the detention basin; additional storage from surface ponding = 12m x 12m x 0.17m = 24.5m<sup>3</sup>

Considering 1%AEP (1:100 year storm return)

Total Required Volume = 187.2m<sup>3</sup> (Storm duration 10 hrs, 1:100 yr return period) , which results in 170mm surface ponding within basin, therefore OK.

Time taken to discharge to half volume (93.6m<sup>3</sup>) = 15.4hrs < 24hrs, therefore OK.

**Surface Ponding Calculation**

Infiltration rate of existing soil = 5.88 X10<sup>-5</sup> m/s, as determined on site

As this bioretention area is considered to be a 'plane' infiltration system, a factor of safety is applied to the infiltration rate over the plane of the soil medium base.

Referring to section 7.4.1.1 Siltation Effects on Infiltration performance (above);

Factor of safety to be applied = 5.0 (table 25.2 Suds Manual), the drained area is 2628m<sup>2</sup>, and given the location of this rain garden, the consequences of failure is 'minor damage to external areas or inconvenience (ie surface water on car parking)

Factored Infiltration rate of soil media = (5.88 X10<sup>-5</sup> m/s) / 5.0 = 1.176 X10<sup>-5</sup> m/s

Total available stormwater ponding attenuation volume within bioretention area, limited to 150mm depth = 12.0m x 12.0m x 0.15m = 21.6m<sup>3</sup> .

Storm return periods and rainfall intensities for dry detention Area 2 - (partial rd) :

No ponding occurs in the detention basin at 10%AEP, for any storm duration.

Ponding occurs within the detention basin at 1%AEP, at from 4hr to 10hr storm duration



## **7.6 Tree Pit Sizing**

Tree pits are proposed to provide for a nature based solution to some road areas.

Inlet to the tree pits are via 'open channel' of an inlet kerb from the adjacent road surface. Tree pits are designed in compliance with SUDS manual C753, along with the reference to the guidance document '*Greening and Nature Based Suds for active travel schemes - National Transport Authority (NTA)*', and specifically the recommendations regarding the 'Stockholm System' of Tree-pit Design.

Size of individual tree pit = 2.5m x 2.5m x 2.15m deep. (minimum)

Minimum volume of structural soil, including root bulb, = 2.5mx2.5m x 1.4m deep = 8.75m<sup>3</sup>

Minium requirement for very small tree planting (trees < 5m) = 8m<sup>3</sup> ('Stockholm' tree pits, with structural soil)

Therefore, size of tree pit is adequate for tree health. (refer to Landscape architects Specifications)

### **Areas Considered**

Each tree pit is designed to accommodate a maximum road area of up to 110m<sup>2</sup>. (see calculations in appendix D)

### **Attenuation / storage calculations**

The total storage depth of the tree pit aspect, is as follows

1. Surface ponding depth = 150mm void ratio = 100%
2. Structural Soil media depth = 1400mm, void ratio = 43%
3. Drainage Stone depth = 600mm, void ratio = 30%

Volume of storage within Drainage stone layer = 2.5m x 2.5m x 0.2m x 0.3 = 0.375m<sup>3</sup>

Volume of storage within crates layer = 2.5m x 2.5m x 0.4m x 0.95 = 2.375m<sup>3</sup>

Volume of storage within soil media layer = 2.5m x 2.5m x 1.4m x 0.43 = 3.76m<sup>3</sup>

Volume of storage from surface ponding = 2.5m x 2.5m x 0.15m = 0.94m<sup>3</sup>

Check for 1% AEP (1:100 year storm return)

Total Required Volume = 7.04m<sup>3</sup> (Storm duration 6 hr) < Total Volume Provided = 7.45 m<sup>3</sup> therefore OK.

Therefore OK.

**Surface Ponding Calculation**

(see Appendix D and calculation document)

Storm water to flow into the tree pit, and infiltrate to the soil medium, with a 150mm surface ponding capacity, over.

As the bioretention area (ie soil medium) is considered to be a 'plane' infiltration system, a factor of safety is applied to the infiltration rate over the plane of the soil medium base.

Referring to section 7.4.1.1 Siltation Effects on Infiltration performance (above);

Factor of safety to be applied = 3.0 (table 25.2 Suds Manual), the drained area is 110m<sup>2</sup>, and given the location of this rain garden, the consequences of failure is 'minor damage to external areas or inconvenience (ie surface water on car parking)

Factored Infiltration rate of soil media =  $(8.33 \times 10^{-5} \text{ m/s}) / 3.0 = 2.77 \times 10^{-5} \text{ m/s}$

Tree pit base area = 2.5m x 2.5m = 6.25m<sup>2</sup>

**Treepit (bioretention) - summary**

Overall volume of proposed tree-pit , including overflow pipe to modular crates and drainage bedding stone is satisfactory up to 1%AEP.

Overflow, to underground crates is required for storm durations of 50%AEP (from 30mins to 4hrs)

Overflow, to underground crates, is required for storm durations of 10%AEP (from 5mins to 10hrs)

Overflow, to underground crates, is required for all storm durations of 1%AEP.

(see Appendix D – Summary of Calculations)

## **7.7 Permeable Paving Design**

Carpark areas are to be designed as permeable paving.

Each general carpark area =  $2.5\text{m} \times 5.0\text{m} = 12.5\text{m}^2$

Include for an additional  $5\text{m}^2$  (ie  $2.0\text{m}$  wide footpath adjacent to a  $2.5\text{m}$  wide carparking space), to allow for adjacent footpaths, area =  $12.5\text{m}^2 + 5\text{m}^2 = 17.5\text{m}^2$

Take 1:100 year storm event, and 20% climate change factor.

Soil infiltration rate =  $5.88 \times 10^{-6} \text{ m/s}$

Porosity of sub-base = 0.3 (ie sand/ gravel)

Attenuation storage required = nil (see Appendix D)

Provided =  $17.5\text{m}^2 \times 0.2\text{m} \times 0.3 = 1.02\text{m}^3$  per space

### **Permeable Paving Summary**

Direct infiltration to the ground. No requirement for attenuation storage due good infiltration rates of soil and porosity of sub-base. Permeable paving mimics greenfield site.

Sub-base to be provided for structural purposes, rather than attenuation requirements, as follows;

(Carparking – light vehicle with occasional heavy vehicle over run)

Assumed CBR = 7% (sandy / gravel)

Block = 60mm

Grit layer = 30mm

Subbase, Type 1 = 200mm

Note: 2No layers of geotextile, (Tencate geoclean, aquatextile, of equal approved)

(see calculation sheet document)

## **7.8 Flow routes and Greenfield run-off**

Whole on-site infiltration is proposed, within the development, with no off-site discharge of storm water, to the public sewer

Existing greenfield run-off rate =  $1.9\text{L/s/Ha} = 1.9 \times 2.23\text{Ha} = 4.2\text{L/s}$   
(see calculation sheets)

The existing flow routes, relating to contours is shown below;



### *Existing flow routes*

The modified flow routes, post development, while predominantly via road corridors, mimics closely the pre-development flow routes and contour paths.

Various infiltration / suds methods are proposed, capturing various sub-catchments, dispersed around the site, which are generally as follows; (see also Suds Layout drawing)

Carparking areas: permeable pavement (Concrete Block Permeable paving)

Roofs: predominately various soakaways dispersed around the site, and a bioretention area


Roads: tree pits and a detention basin area

Generally, the location of soakaways, is proposed under green areas

All Suds methods have been designed with the appropriate factors of Safety, as per SUDs manual, and utilizing a 1:100 year return period and 20% climate change factor.

Any overflow exceedance, which will generally follow the road corridor, is predominately directed to the detention basin area, and the bioretention area, and directed away from buildings.

Given the above infiltration methods proposed, no increase in greenfield run-off rate will occur.



*Modified flow routes*

## **7.9 Conveyancing pipework Design**

Pipe size and gradient are determined to accommodate the required design flow.  
(see calculations in appendices)

PVCu pipes are proposed.

Surface Roughness = 0.6mm (BS 8301).

From Calculations, the maximum rainfall intensity for the conveyance pipe system, is designed to accommodate a minimum 1:10 year storm return period and a 20% climate change factor applied for a 5min storm duration). Additionally, check is made for a 1:100 year storm event, as pipe diameter is unlikely to change significantly, for this higher storm event period.

Take the following maximum rainfall intensities for the following storm events;

1:10 year event (10% AEP): Rainfall intensity = 94.7mm (5min duration)

1:100 year event (1% AEP): Rainfall Intensity = 114.3mm/hr (5min duration)  
(see Calculation document)

Flow rates are calculated within each run of pipe, depending on relevant area considered. Flow rate calculations are given in appendices.

The cumulative flow rates are then considered.

The conveyancing pipework is sized accordingly depending on catchment area, rainfall intensity, and gradient.

Storm water drainage flow rates, and final outflow pipe diameter sizes are summarized within Appendix B.

## **8.0 Foul Water Drainage**

The proposed foul water drainage system, is to be connected to the existing public mains system, to the south of the site. A pre-connection application was previously submitted to Uisce Eireann on 16/9/2024 resulting in a Confirmation of Feasibility, which was issued on the 27<sup>th</sup> March 2025 (Appendix A).

Based on this pre-connection enquiry, Uisce Eireann deemed this proposal "*Feasible, without infrastructure upgrade*"

Uisce Eireann Reference for this Pre-Connection enquiry is CDS25009234.

Conveyancing of effluent is via PVCu pipes at relevant diameters and gradients, depending on flow loadings, as per Uisce Eireann requirements and Foul Water hydraulic flow calculations.

No storm water run-off will enter the foul water system - all storm water will be treated separately to the foul drainage system, as previously described in this report.

## 8.1 Foul Water Drainage Design.

The 'population method', used for calculating Dry Weather Flows (DWF) will be used, in accordance with the Uisce Eireann "Code of Practice for Waste Water Infrastructure".

Referring to Section 3.6 – Hydraulic Design For Gravity Sewers of the above Code of Practice (CoP);

The Irish Water requirements for the design of wastewater gravity sewers are set out in Appendix B of this Code of Practice. (Appendix B – Gravity Sewer Design Requirements). However,

*"Works in residential Developments, the sewer capacity criteria for a development are considered to be satisfied, without the need for a full Appendix B design assessment, where the pipe size and gradient requirements for the full potential development population corresponds to those in the Table below for the number of dwellings shown"*

The following table is extracted from the above code of practice, and applicable to this residential development;

| Table: Sewer Size/Gradient for Multiple Properties |                  |                  |
|----------------------------------------------------|------------------|------------------|
| Number of Dwellings                                | Pipe Diameter    | Minimum Gradient |
| 2 to 9                                             | 150mm (or 225mm) | 1:60             |
| 10 to 20                                           |                  | 1:150            |
| 21 to 210                                          | 225mm            | 1:200            |
| 211 to 250                                         |                  | 1:150            |
| 251 to 330                                         |                  | 1:100            |
| 331 – 450                                          | 300mm            | 1:300            |
| 451 to 565                                         |                  | 1:200            |
| 566 to 655                                         |                  | 1:150            |
| 656 to 830                                         |                  | 1:100            |

The number of proposed dwellings = 123.

For a foul pipe serving between 21No and 210No dwellings, a 225mm dia pipe is permitted, to a minimum gradient of 1:200.

For a foul pipe serving between 10 and 20No dwellings, a 150mm dia pipe is permitted, at a minimum gradient of 1:150.

For a foul pipe serving between 2 and 9No dwellings, a 150mm dia pipe is permitted, at a minimum gradient of 1:60.

Individual dwellings will be first connected to a 100mm dia pipe at 1:40 gradient, before connecting to the main drainage network.

Section 3.6 of the Code Of Practice states that 2.7 persons per dwelling, and a per capita of waste water flow of 150 litres per head per day should be considered within the design calculations, along with a 10% unit consumption allowance (section 3.6.3 and 2.2.4 of CoP).

On this basis the Design occupancy of the proposal = 330 persons.

#### Dry Weather Flow (DWF)

The Dry Weather Flow, used in the CoP, is defined as *“The average daily flow....during seven consecutive days without rain (excluding a period which includes public of local holidays) following seven days during which rainfall did not exceed 0.25mm on any one day”* - CIWEM 1993 (Chartered Institute of Water and Environmental Management)

$DWF = (2.7 \text{ persons} \times 150 \text{ L/head/day}) \times 1.1 = 446 \text{ L / dwelling, rounded up to } 450 \text{ L/dwelling/day}$

However, a minimum wastewater volume of between 6 times and 2.5 times the dry weather flow (DWF) is required, depending on the size of the Development.

Referring to cl 2.2.5 of the CoP *“Domestic Wastewater Peaking Factors For the design of new or upgraded wastewater networks, the peaking factors applied to domestic wastewater flows (PfDom) are to be in accordance with the Table below”*.

| Population      | Peaking Factor<br>(Pf <sub>Dom</sub> ) |
|-----------------|----------------------------------------|
| 0 to 750        | 6                                      |
| 751 to 1,000    | 4.5                                    |
| 1001 to 5,000   | 3.0                                    |
| 5,001 to 10,000 | 2.5                                    |

Number of dwelling units = 123 < 750. Therefore, the Peaking Factor multiplier for this proposed development is 6.



$$\text{DWF} = (123 \times 450) / (24 \times 60 \times 60) = \underline{0.64 \text{ L/s.}}$$

$$\underline{\mathbf{6DWF = 3.84 \text{ L/s}}}$$

The overall wastewater generated from the proposed development = 450L x 123 units = **55350L (55.35m3)**

However, the total number of persons, based on number of bedrooms provided is considered to be more than the average 2.7 persons per dwelling. This will increase the waste water load of the overall drainage system, and for accuracy, it is the following design occupancy that will be used in the drainage calculations.

$$\text{DWF Litres / day} = \text{No persons} \times 150\text{L} \times 1.1$$

DWF for each Building (apartment) block, is shown on the table below;

| <b>Building Block</b> | <b>No. of Persons</b> | <b>DWF / day per block L/day</b> | <b>DWF L/s</b> | <b>6DWF L/s</b> | <b>6DWF (m3/s)</b> |
|-----------------------|-----------------------|----------------------------------|----------------|-----------------|--------------------|
| Block A               | 45                    | 7425                             | 0.09           | 0.52            | 0.000516           |
| Block B               | 24                    | 3960                             | 0.05           | 0.28            | 0.000275           |
| Block C               | 45                    | 7425                             | 0.09           | 0.52            | 0.000516           |
| Block D               | 45                    | 7425                             | 0.09           | 0.52            | 0.000516           |
| Block E               | 15                    | 2475                             | 0.03           | 0.17            | 0.000172           |
| Block F               | 35                    | 5775                             | 0.07           | 0.40            | 0.000401           |
| Block G               | 36                    | 5940                             | 0.07           | 0.41            | 0.000413           |
| Block H               | 42                    | 6930                             | 0.08           | 0.48            | 0.000481           |
| Block J               | 36                    | 5940                             | 0.07           | 0.41            | 0.000413           |
| Block K               | 27                    | 4455                             | 0.05           | 0.31            | 0.000309           |
| Block L               | 27                    | 4455                             | 0.05           | 0.31            | 0.000309           |
| Block M               | 50                    | 8250                             | 0.10           | 0.57            | 0.000573           |
|                       |                       |                                  |                |                 |                    |
|                       |                       |                                  |                |                 |                    |
| <b>Total (L)</b>      | <b>427</b>            | <b>70455</b>                     | <b>0.82</b>    | <b>4.89</b>     | <b>0.004893</b>    |

$$\underline{\mathbf{6DWF = 4.89 \text{ L/s (at outflow)}}}$$

The overall wastewater generated from the proposed development= **70455L (70.455m3)**

## **General Design Requirements**

### **Self-cleansing Velocity**

Self-cleansing velocity in the pipe system at least once per day. This varies for pipe sizes with self cleansing velocity of 0.75m/sec for pipes less than 300mm diameter and 0.77m/sec for pipes 375mm and 450mm diameter.

A flow velocity at the design flow (i.e. peak flow) of between the required self cleansing velocity (using 0.75m/sec) and a velocity of 2.0m/s, with an absolute velocity of 2.5m/s as an upper limit should be used.

### **Roughness Value**

The roughness value (ks) for Gravity Sewer design should be chosen to suit the material being proposed and the “long term roughness value” should be chosen.

All drainage pipework will be of PVCu construction. The following roughness factors will apply

Ks = 0.3mm for velocity flow > 1.5m/s  
Ks = 0.6mm for velocity flow > 1.0m/s  
Ks = 1.5mm for velocity flow 0.76m/s to 1.0m/s and for intermittent flow  
(BS 8005 and BS8301)

### **Gradients and Pipe diameters**

Pipe sizes and gradients shall be selected from approved pipe design tables, based on an approved design approach, such as the use of the Colebrook White equation. Alternatively, Pipe sizes and gradients will be checked by calculation.

A service connection with a nominal internal diameter of 100 mm laid to a gradient not flatter than 1:80, where there is at least one WC connected and 1:40 if there is no WC connected.

In general, the following should apply;

Pipes of 100mm diameter should be laid at minimum gradients of between 1:60 and 1:100.

Pipes of 150mm diameter should be laid at a minimum gradient of 1:150.

Pipes of 225mm diameter should have a minimum gradient of 1:200

Pipes of greater diameter should comply with self cleansing and maximum velocity requirements.

Pipe gradients for private side drainage should be constructed in accordance with that indicated above as a minimum, or with Building Regulations requirements.

The maximum allowable gradient for gravity sewers should be chosen so as to achieve a full bore velocity of no greater than 2.5m/s.

Maximum Pipe Gradients to be as follows;

**Table: Maximum sewer gradients**

| Pipe Diameter | Maximum Pipe Gradient |
|---------------|-----------------------|
| 150 mm        | 1:13                  |
| 225 mm        | 1:22                  |
| 300 mm        | 1:31                  |

### **Check on existing sewer connection**

The final discharge foul pipe, from the Development is sized at 225mm dia at a 1:100 gradient, which had been sized for a peak flow of 4.89 L/s

This connects on to an existing main sewer pipe, 225mm dia, serving several small housing estates, totalling 200No units.

Dry Weather Flow is existing sewer pipe,  $DWF_{\text{existing}} = (200 \times 450) / (24 \times 60 \times 60) = \underline{1.04\text{L/s}}$ .

$6DWF_{\text{existing}} = \mathbf{6.251\text{ L/s}}$

Total proposed  $6DWF = 6.251 + 4.89 = \mathbf{11.14\text{L/s}}$

The 225mm dia pipe at 1:100 gradient, is adequate to accept the proposed discharge rate.

### **Internal Drainage and Drainage around each block.**

The discharge unit method will be used, and the drainage pipe runs around each block will be designed and sized to BS EN 12056-2:2000 – *Gravity Drainage Systems Inside Buildings*.

A pre-connection application was previously submitted to Uisce Eireann on 4/12/2025 , resulting in a Confirmation of Feasibility , which was issued on the 14<sup>th</sup> April 2026 (Appendix A), for water connection and wastewater connection.

Based on this pre-connection enquiry, Uisce Eireann deemed this proposed waste water connection *“Feasible, without infrastructure upgrade by Uisce Eireann.”*

*Therefore Uisce Eireann have concluded that the foul water connection is feasible without any infrastructure upgrade to the existing public foul sewer system.*

## **9.0 Mains Water Supply**

The proposed water supply system, is to be connected to the existing water mains system, to the south of the site. The Uisce Eireann Confirmation of Feasibility, as mentioned above (Appendix A), deemed the proposed Water Connection “*Feasible, subject to upgrades*” as follows;

- *The existing 250mm watermain along park Road is currently being upsized to 300mm ID.*
- *The existing 100mm uPVC watermain feeding the existing estate to the south of the development is planned to be upsized to 200mm ID for a length of approximately 250m from the Park Road Junction*
- *The new spine road being built by the local authority will also have a 250mm watermain and 525mm sewer laid to serve the area*
- *The development layout should be designed to be fed from the 250mm watermain in the spine road*
- *If the development proceeds prior to the new 250mm watermain in the spine road and the upsizing of the 100mm uPVC watermain to the South of the development to 250mm then a proportion of the costs will be payable as part of the developments Connection Agreement at the application stage.*

### **Calculation of Water Consumption**

Average Daily consumption / dwelling unit = 150L/person/day

Design occupancy of overall development = 427 persons x 150L = 64050 L / day

Average Flow rate (for 16hour day) =  $64050 / (16 \times 60 \times 16) = 1.11\text{L/s}$

Peak Flow =  $5 \times 1.11 = 5.55\text{L/s}$

Internal Pipe dia required = 150mm (section 3.5.15)

Subject to Agreement, an 150mm diameter water connection is proposed, reducing to 100mm diameter branches within the development site. The proposed water main will be connected to the existing watermain within the main access road to the development . Adequate valves, hydrants, scour valves or washout hydrants, meters, ducts, tapping locations, Water Main and service pipes, Boundary Boxes, etc will be incorporated into the development, all to Uisce Eireann standard specifications. (Water Supply and Water Infrastructure Standard Details). Water distribution supply to houses, duplex, and apartments to be sized to suit respective uses / building type.

## **9.1 Fire Flow Requirements**

5No Fire Hydrants are proposed, around the site.

Minimum Flow Coefficient = 92.

Equivalent outlet = 2000L/min at 170kPa = 33.3L/s (*BS750:2012 Specification for underground fire hydrants and surface box frames and covers, cl 10.2*).

Minimum internal diameter for Fire Hydrants = 100mm.

Fire hydrants are to be between 6m and 46m from any proposed buildings, to comply with Building Regulations Technical Guidance Document Part B (fire Safety), and installed in accordance with the Uisce Eireann “Code of Practice for Water Infrastructure”.

## **10.0 Storm and Foul Water Management in relation to the Existing Waste Water Treatment Plant (WWTP) in Killarney**

The above storm water design philosophy and approach, is such that there will be no discharge of storm water from this proposed development, and that all storm water shall be treated within the site, via infiltration methods, and natural SUDs solutions.

There is no stormwater connection needed, nor required, from this site. In this respect, no stormwater from this development will enter the network connecting to the Killarney WWTP.

In relation to the Kerry County Development Plan (KCDP), Variation No 2, s.2.1.9.4.3 (drainage), it is noted that Uisce Eireann have advised that their Asset Planning team are currently looking for an alternative primary discharge location for the Killarney Waste Water Treatment Plant (WWTP).

It is also noted that it is an objective for the Council to facilitate and support Uisce Eireann, who have completed a Drainage Area Plan for Killarney, to help address nutrient loss to watercourses from storm water overflows during rainfall events.

It is stated, within S.2.1.9.4.3, that Kerry County Council supports the implementation of actions arising, which would address capacity issues in the sewer network and support sustainable development, and further, that the KCDP supports the provision of nature-based solutions to storm water and rainwater management.

The importance of providing sustainable, nature-based solutions, has been the central design philosophy for the stormwater treatment and management, within the site, as comprehensively addressed within this report and associated detailed drawings and specifications.

The proposed development has no potential to contribute to storm related overflow discharges at the Killarney WWTP. Any such existing storm related discharges that may occur are entirely unconnected to the application site and are entirely outside the control of the applicant.

It will also be noted that within the foul water drainage design, the foul water peak discharge rate from the site is less than 5L/s. Attempting to further reduce this foul water flow rate would result in a self-cleansing velocity less than the minimum required by Building Regulations (being 0.75m/s) and present a high risk of blockages and maintenance problems within the foul water network.

Great care has been taken within the drainage design, to provide a solution which is compliant to the Building Regulations, and for which Uisce Eireann have approved.


In summary, Uisce Eireann have reviewed our application, and in the contextual framework of their own assets and sewer network capacity, and have determined that proposal is feasible without any infrastructure upgrade to the wastewater -connection.

### **11.0 Caveats**

*This Engineering assessment and drainage design report is intended for the aforementioned proposal only, on behalf of Wrightwood Developments Ltd and their representatives, and no other external third party without permission.*

*Teicniuil Priory Consulting Engineers Ltd is obliged to exercise reasonable skill care and diligence in the performance of the services as required and shall not be liable except to the extent that it has failed to exercise reasonable skill, care and diligence and this report shall be read and construed accordingly. No individual is personally liable in connection with the preparation of this report. By receiving this report and acting on it, the client or any other person accepts that no individual is personally liable whether in contract, tort, for breach of statutory duty or otherwise. Teicniuil Priory Consulting Engineers Ltd has used reasonable endeavours to provide information that is correct and accurate.*

*This report remains the intellectual property of Teicniuil-Priory Consulting Engineers Ltd.*

Signed: \_\_\_\_\_  \_\_\_\_\_

Matt Clarke  
Chartered Building Engineer

Date: \_\_\_\_\_

21/7/2026

## *References:*

*Code of Practice for Wastewater Infrastructure - Uisce Eireann*  
*Code of Practice for Water Infrastructure - Uisce Eireann*  
*TGD Part H (Drainage and Waste Disposal)*  
*BSEN 12056-2:2000 Gravity Drainage Systems Inside Buildings*  
*BSEN752-1-4:2008 Drain and Sewer Systems Outside Buildings.*  
*BS EN 1295-1:2019 Structural Design of buried pipelines under various conditions of loading. General Requirements.*  
*BSEN295-3 2012*  
*BS EN-7:2013*  
*BS8582:2013 Code of Practice for Surface Water Management for Development Sites*  
*The SUDS manual (CIRIA 753 revised 2016)*  
*Greater Dublin Regional Code of Practice for Drainage Works.*  
*Joint Defra/EA Flood and Coastal Erosion Risk Management R+D Program, Technical Report*  
*EA Document – Rainfall Management for Development*  
*Civil Engineering Specification for the Water Industry 7th Edition*  
*BRE Digest 365, Soakaway Design 2016*  
*Civil Engineering Specification for the Water Industry 7th Edition*  
*Sewers for Adoption 7th Edition*  
*BS EN 7533-13:2009, pavements constructed with clay, natural stone, or concrete pavers,: Part 13 Guide for the Design of Permeable Pavements Constructed with concrete paving blocks*  
*And flags, natural stone slabs, and setts and clay pavers.*  
*BS 8301 \_ Code of Practice for Building Drainage (withdrawn), superseded by BS EN 752-4:1998 Drain and sewer systems outside buildings. Hydraulic design and environmental considerations*  
*BS EN 7533-13:2009, pavements constructed with clay, natural stone, or concrete pavers,: Part 13 Guide for the Design of Permeable Pavements Constructed with concrete paving blocks*  
*And flags, natural stone slabs, and setts and clay pavers.*  
*BS750:2012 Specification for underground fire hydrants and surface box frames and covers*  
*Sustainable Residential Development in Urban Areas ( 2009 DoEHLG)*  
*Kerry County Council Development Plan 2022 to 2028*

END

## **Appendix A**



## CONFIRMATION OF FEASIBILITY

Jillian O'Neill  
6 Priory Grove  
Muckross Rd  
Killarney  
Kerry  
V93H3C7  
Ireland

14 April 2026

Uisce Éireann  
Bosca OP 448  
Oifig Sheachadta na  
Cathrach Theas  
Cathair Chorcaí

Uisce Éireann  
PO Box 448  
South City  
Delivery Office  
Cork City

[www.water.ie](http://www.water.ie)

Our Ref: CDS25009234 Pre-Connection Enquiry  
Ardshavooley, Park Road, Killarney, Kerry

Dear Applicant/Agent,

### We have completed the review of the Pre-Connection Enquiry.

Uisce Éireann has reviewed the pre-connection enquiry in relation to a Water & Wastewater connection for a Housing Development of 124 unit(s) at Ardshavooley, Park Road, Killarney, Kerry, (the Development).

Based upon the details provided we can advise the following regarding connecting to the networks;

- **Water Connection**
  - Feasible Subject to upgrades
  - 1) The existing 250mm watermain along Park Road is currently being upsized to 300mm ID as part of our Housing for All plan for the area.
  - 2) In addition, the existing 100mm uPVC watermain feeding the existing estate to the south of your development is planned to be upsized to 200mm ID for a length of approximately 250m from the Park Road junction.
  - 3) The new spine road, being built by the Local Authority, will also have a 250mm watermain and 525mm sewer laid to serve the area.
  - Please note that your development layout should be designed to be fed from the 250mm watermain in the spine road.

**Stiúrthóir / Directors:** Jerry Grant (Cathaoirleach / Chairperson), Niall Gleeson (POF / CEO), Douglas Millican, Michael Nolan, Patricia King, Eileen Maher, Cathy Mannion, Michael Walsh, Rena O'Sullivan and Orlagh Nevin.

**Oifig Chláraithe / Registered Office:** Teach Colvill, 24-26 Gráid Thailbóid, Baile Átha Cliath 1, D01 NP86 / Colvill House, 24-26 Talbot Street, Dublin, Ireland D01NP86

Is cuideachta ghníomhaíochta ainmnithe atá faoi theorainn scaireanna é Uisce Éireann / Uisce Éireann is a designated activity company, limited by shares.

Cláraithe in Éirinn Uimh.: 530363 / Registered in Ireland No.: 530363

- In addition, should your development proceed prior to the new 250mm watermain in the spine road and the upsizing of the 100mm uPVC watermain to the south of your development to 250mm, then a proportion of the costs for item 2) will be payable as part of your developments Connection Agreement at the Application stage.
- **Wastewater Connection**
  - Feasible without infrastructure upgrade by Uisce Éireann
  -

This letter does not constitute an offer, in whole or in part, to provide a connection to any Uisce Éireann infrastructure. Before the Development can be connected to our network(s) you must submit a connection application and be granted and sign a connection agreement with Uisce Éireann.

As the network capacity changes constantly, this review is only valid at the time of its completion. As soon as planning permission has been granted for the Development, a completed connection application should be submitted. The connection application is available at [www.water.ie/connections/get-connected/](http://www.water.ie/connections/get-connected/)


### Where can you find more information?

- Section A - What is important to know?
- Section B - Details of Uisce Éireann's Network(s)

**This letter is issued to provide information about the current feasibility of the proposed connection(s) to Uisce Éireann's network(s). This is not a connection offer and capacity in Uisce Éireann's network(s) may only be secured by entering into a connection agreement with Uisce Éireann.**

For any further information, visit [www.water.ie/connections](http://www.water.ie/connections), email [newconnections@water.ie](mailto:newconnections@water.ie) or contact 1800 278 278.

Yours sincerely,



**Dermot Phelan**  
Connections and Developer Services

# Appendix B

| Conveyancing Pipework - Outlet Flow to SUDs component.                                                                                                                             |                   |                  |                 |                  |                                 |                |                              |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------|-----------------|------------------|---------------------------------|----------------|------------------------------|--|
| General Parameters                                                                                                                                                                 |                   |                  |                 |                  |                                 |                |                              |  |
| PVCu Pipework surface roughness = 0.6mm                                                                                                                                            |                   |                  |                 |                  |                                 |                |                              |  |
| Maximum Rainfall Intensity (5min duration) Considered.                                                                                                                             |                   |                  |                 |                  |                                 |                |                              |  |
| 1 to 2 year return period = 62.4 mm/hr                                                                                                                                             |                   |                  |                 |                  |                                 |                |                              |  |
| 1 to 10 year return period = 94.7 mm/hr                                                                                                                                            |                   |                  |                 |                  |                                 |                |                              |  |
| 1 to 100 year return period = 114.3 mm/hr                                                                                                                                          |                   |                  |                 |                  |                                 |                |                              |  |
| Block                                                                                                                                                                              | area<br>(m2)      | Outflow          |                 | Pipe<br>gradient | min pipe dia<br>(final Outflow) |                | outflow to<br>Suds Component |  |
|                                                                                                                                                                                    |                   | 10% AEP<br>(L/s) | 1% AEP<br>(L/S) |                  | 10% AEP<br>(mm)                 | 1% AEP<br>(mm) |                              |  |
| Block A                                                                                                                                                                            | 569.8             | 15               | 22.8            | 1/150            | 200                             | 200            | soakaway No 1                |  |
| Block B                                                                                                                                                                            | 302.5             | 8.0              | 12.1            | 1/150            | 150                             | 150            | soakaway No 2                |  |
| Block c                                                                                                                                                                            | 569.8             | 15.0             | 22.8            | 1/150            | 200                             | 200            | soakaway No 3                |  |
| Block D                                                                                                                                                                            | 568.7             | 15.0             | 22.8            | 1/150            | 200                             | 200            | soakaway No 3                |  |
| Block E                                                                                                                                                                            | 347.6             | 9.1              | 13.9            | 1/150            | 150                             | 150            | soakaway No 3                |  |
| Block F                                                                                                                                                                            | 794.2             | 20.9             | 31.8            | 1/150            | 200                             | 225            | soakaway No 3                |  |
| Block G                                                                                                                                                                            | 457.6             | 12.0             | 18.3            | 1/150            | 200                             | 200            | soakaway No 4                |  |
| Block H                                                                                                                                                                            | 547.8             | 14.4             | 22.0            | 1/150            | 200                             | 200            | soakaway No 5                |  |
| Block J                                                                                                                                                                            | 456.5             | 12.0             | 18.3            | 1/150            | 200                             | 200            | soakaway No 3                |  |
| Block K                                                                                                                                                                            | 305.8             | 8.0              | 12.3            | 1/150            | 150                             | 150            | soakaway No 5                |  |
| Block L                                                                                                                                                                            | 377.3             | 9.9              | 15.1            | 1/150            | 150                             | 150            | soakaway No 6                |  |
| Block M                                                                                                                                                                            | 700.7             | 18.4             | 28.1            | 1/150            | 200                             | 200            | Bioretention<br>area 1       |  |
| Partial<br>Road                                                                                                                                                                    | 1737              | 45.7             | 69.6            | 1/150            | 300                             | 300            | Bioretention area 2          |  |
| cumulative<br>Blocks j,<br>C +D                                                                                                                                                    | 1595              | 41.9             | 63.9            | 1/150            | 300                             | 300            | soakaway No 3                |  |
| cumulative<br>Blocks<br>E and F                                                                                                                                                    | 1141.<br>7        | 30               | 45.7            | 1/150            | 300                             | 300            | soakaway No 3                |  |
| Road<br>into<br>Tree pits                                                                                                                                                          | 125<br>per<br>pit | 3.3              | 5               | 1/100            | 150                             | 150            | tree pit                     |  |
| Notes                                                                                                                                                                              |                   |                  |                 |                  |                                 |                |                              |  |
| General Conveyancing pipework generally designed to 1:10 year return period. However, almost all pipe sizes at 1:10year return, can accommodate a 1:100 year return design period. |                   |                  |                 |                  |                                 |                |                              |  |

# Appendix C



## Technical data sheet

TenCate GeoClean®

|                                                                                                                          |                                                                                                                    | Origin               | Crystal              | Pure   |
|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|--------|
| <b>Oil fixation and water treatment efficiency <sup>(1)</sup></b>                                                        |                                                                                                                    |                      |                      |        |
| <i>Chronic and diffuse oil <sup>(2)</sup></i>                                                                            |                                                                                                                    |                      |                      |        |
| Oil fixation rate                                                                                                        |                                                                                                                    | %                    | > 99                 | > 99   |
| Residual Hydrocarbon Content (TPH) into water after percolating through the structure with one or two aquatextile levels | 1 level                                                                                                            | mg/l                 | < 2                  | < 2    |
|                                                                                                                          | 2 levels                                                                                                           | mg/l                 | < 1                  | < 1    |
| <i>Localized oil spill (in case of traffic accident) <sup>(3)</sup></i>                                                  |                                                                                                                    |                      |                      |        |
| Oil fixation rate                                                                                                        |                                                                                                                    | %                    | > 99                 | > 99   |
| Maximum fixation capacity of the structure with 1 or 2 two levels of aquatextile                                         | 1 level                                                                                                            | l/m²                 | > 0,2                | > 0,3  |
|                                                                                                                          | 2 levels                                                                                                           | l/m²                 | > 0,5                | > 1    |
| <b>Active oil biodegradation <sup>(4)</sup></b>                                                                          |                                                                                                                    |                      |                      |        |
| Biodegradation potential <sup>(4)</sup>                                                                                  |                                                                                                                    |                      | ++                   | ++++   |
| Optimal biodegradation speed                                                                                             | m/m²/year                                                                                                          | 120                  | 120                  | 120    |
| Biodegradation rate compared to an average diffuse oil load from a car park                                              |                                                                                                                    | > x 10               | > x 10               | > x 10 |
| <b>Water permeability</b>                                                                                                |                                                                                                                    |                      |                      |        |
| Water permeability normal to the plane under a water head of 5 cm                                                        | mm/s                                                                                                               | > 10                 | > 10                 | > 10   |
| <b>Other characteristics</b>                                                                                             |                                                                                                                    |                      |                      |        |
| Material                                                                                                                 | Inert polymer material                                                                                             |                      |                      |        |
| Structure                                                                                                                | Bicolour two-layer aquatextile made of continuous oleophilic filaments                                             |                      |                      |        |
| Active top blue layer                                                                                                    | Releases a natural growth activator for the biodegrading microorganisms                                            |                      |                      |        |
| Disposal                                                                                                                 | After use, when the oil is fully biodegraded, the aquatextile can be considered as an inert construction material. |                      |                      |        |
| <b>Packaging</b>                                                                                                         |                                                                                                                    |                      |                      |        |
| Rolls                                                                                                                    | 3m x 80m<br>6m x 80m                                                                                               | 3m x 60m<br>6m x 60m | 3m x 40m<br>6m x 40m |        |

(1) The tests were carried out on pavement systems supplied with engine oil.  
(2) The test procedure will be communicated upon request.  
(3) The quantity of biodegradable hydrocarbons depends on the maximum oil fixation capacity.  
Attention: the values given are indicative and correspond to average results obtained in our laboratories and external testing institutions. The above values are those in force on the date of publication of this data sheet and are subject to change at any time. Please check that you have the latest edition of the technical data sheet.

**For more information on projects, installation of the aquatextile and the savings, please contact us:**



**TenCate AquaVia S.A.S.**  
[contact@tencateaquavia.com](mailto:contact@tencateaquavia.com) | +33 1 34 23 53 96  
8, rue Marcel Paul - 95670 Beaons - France  
[www.tencategeoclean.com](http://www.tencategeoclean.com)

### AQUATEXTILE

Technical textile dedicated to the decontamination of runoff water.

It manages the quality of the rainwater throughout its infiltration into the ground

### ACTIVE OIL-BIODEGRADING AQUATEXTILE

Fixes hydrocarbons including PAHs and boosts systematically their biodegradation



**ARTIFICIAL RAIN**

**OIL**

Permeable pavement  
5 cm bedding layer  
TenCate GeoClean®  
50 mm stone (25 cm)  
or gravel (15 cm)  
TenCate GeoClean® (optional)  
Water collection

## **Appendix D**

# **Summarized Hydraulic Calculations**

## Hydraulic Calculations for Bioretention Area

| Sub-Catchment Considered :                         |                                 |                                |                                                                                                | Build / Roof for Block M                       |                                                                    |                                             |                                        |             |
|----------------------------------------------------|---------------------------------|--------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------|----------------------------------------|-------------|
| SuDs Component                                     |                                 |                                |                                                                                                | Bioretention Area / raingarden                 |                                                                    |                                             |                                        |             |
| Size of Suds                                       | Bioretention Area 1             | =                              | 13.3m x 3m on plan                                                                             |                                                | 150mm surface ponding<br>600mm soil medium<br>800mm Modular Crates |                                             |                                        |             |
| Component                                          | overflow storage                | =                              | 13.3mx3mx0.8m                                                                                  |                                                |                                                                    |                                             |                                        |             |
| Surface water run-off area                         |                                 | =                              | 722m2                                                                                          |                                                | (inc. 10% Urban Creep)                                             |                                             |                                        |             |
| PIMP                                               |                                 | =                              | 100%                                                                                           |                                                |                                                                    |                                             |                                        |             |
| Return period                                      |                                 | =                              | 2 years, 10 years and 100 years                                                                |                                                |                                                                    |                                             |                                        |             |
| Climate Change factor                              |                                 | =                              | 20%                                                                                            |                                                |                                                                    |                                             |                                        |             |
| <u>Infiltration rate of soils:</u>                 |                                 |                                |                                                                                                |                                                |                                                                    |                                             |                                        |             |
| Imported soil media,                               |                                 | =                              | 300 mm/hr                                                                                      |                                                | (8.33x10 <sup>-5</sup> m/s)                                        |                                             | x 13.3m x 3.0m                         |             |
| Factor of safety                                   |                                 | =                              | 1.5                                                                                            |                                                | (table 25.2 Suds Manual)                                           |                                             |                                        |             |
| factored Infiltration rate (outflow) of soil media |                                 | =                              | 5.56x10 <sup>-5</sup> m/s                                                                      |                                                | =                                                                  | 2.22 L/s                                    |                                        |             |
| sub-soil infiltration rate (existing)              |                                 | =                              | 5.88x 10 <sup>-5</sup> m/s, factored = 5.88x10 <sup>-5</sup> / 1.5 = 3.92x10 <sup>-5</sup> m/s |                                                |                                                                    |                                             |                                        |             |
|                                                    |                                 | =                              | 1.56L/s (factored)                                                                             |                                                |                                                                    |                                             |                                        |             |
| max depth of surface ponding                       |                                 | =                              | 150mm (ie design maximum permitted)                                                            |                                                |                                                                    |                                             |                                        |             |
| surface ponding storage, Vt                        |                                 | =                              | 0.15 x 10m x 4m                                                                                |                                                | =                                                                  | 6 m3                                        |                                        |             |
| 1 to 2 year return period                          |                                 |                                |                                                                                                |                                                |                                                                    |                                             |                                        |             |
| Storm water duration (t)                           | Rainfall Intensity (i) (mm/hr ) | Max Surface run-off (V1) (L/s) | max outflow through soil (factored) (V2) (L/s)                                                 | rainfall depth (2 year return period) (d) (mm) | Storage required depth (Vs) (m3)                                   | available ponding storage (150mm) (Vt) (m3) | Depth of ponding in bio-retention (mm) | comment     |
| 5 mins                                             | 62.4                            | 12.5                           | 2.22                                                                                           | 5.2                                            | 3.08                                                               | < 5.99                                      | 77                                     | no overflow |
| 10 mins                                            | 46.2                            | 9.3                            | 2.22                                                                                           | 7.7                                            | 4.25                                                               | <5.99                                       | 106                                    | no overflow |
| 15 mins                                            | 38.9                            | 7.8                            | 2.22                                                                                           | 9.7                                            | 5.02                                                               | <5.99                                       | 126                                    | no overflow |

|         |      |     |      |      |      |       |     |             |
|---------|------|-----|------|------|------|-------|-----|-------------|
| 30 mins | 26.6 | 5.3 | 2.22 | 13.3 | 5.54 | <5.99 | 139 | no overflow |
| 1hr     | 18.5 | 3.7 | 2.22 | 18.5 | 5.33 | <5.99 | 133 | no overflow |
| 2hr     | 12.5 | 2.5 | 2.22 | 25   | 2.02 | <5.99 | 50  | no overflow |
| 4hr     | 8.4  | 1.7 | 2.22 | 33.7 | Nil  | <5.99 | Nil | no ponding  |
| 6hr     | 7.1  | 1.4 | 2.22 | 42.6 | Nil  | <5.99 | Nil | no ponding  |
| 10hr    | 5.1  | 1.0 | 2.22 | 51   | Nil  | <5.99 | Nil | no ponding  |
| 24hr    | 3    | 0.6 | 2.22 | 71.3 | Nil  | <5.99 | Nil | no ponding  |

**Notes:**

where depth of surface ponding exceeds 150mm, overflow is directed to an overflow attenuation system. No Overflow occurs

**Critical Storm Duration for surface ponding = 30mins**

**1 to 10 year return period**

| Storm water duration (t) | Rainfall Intensity (i) (mm/hr) | Max Surface run-off (V1) (L/s) | max outflow through soil (factored) (V2) (L/s) | rainfall depth (10 year return period) (d) (mm) | Storage required depth (Vs) (m3) | available ponding storage (150mm) (Vt) (m3) | Depth of ponding in bio-retention (mm) | comment     |
|--------------------------|--------------------------------|--------------------------------|------------------------------------------------|-------------------------------------------------|----------------------------------|---------------------------------------------|----------------------------------------|-------------|
| 5 mins                   | 94.7                           | 19                             | 2.22                                           | 7.9                                             | 5.03                             | < 5.99                                      | 126                                    | no overflow |
| 10 mins                  | 71.3                           | 14.3                           | 2.22                                           | 11.9                                            | 7.25                             | >5.99                                       | 181                                    | overflow    |
| 15 mins                  | 60.2                           | 12.1                           | 2.22                                           | 15.1                                            | 8.89                             | >5.99                                       | 222                                    | overflow    |
| 30 mins                  | 41.1                           | 8.2                            | 2.22                                           | 20.5                                            | 10.76                            | >5.99                                       | 269                                    | overflow    |
| 1hr                      | 28.1                           | 5.6                            | 2.22                                           | 28.1                                            | 12.17                            | >5.99                                       | 304                                    | overflow    |
| 2hr                      | 18.4                           | 3.7                            | 2.22                                           | 36.8                                            | 10.66                            | >5.99                                       | 266                                    | overflow    |
| 4hr                      | 11.9                           | 2.4                            | 2.22                                           | 47.8                                            | 2.59                             | <5.99                                       | 64.8                                   | no overflow |

|      |     |     |      |      |     |       |     |            |
|------|-----|-----|------|------|-----|-------|-----|------------|
| 6hr  | 9.8 | 2   | 2.22 | 58.6 | Nil | <5.99 | Nil | no ponding |
| 10hr | 6.9 | 1.4 | 2.22 | 68.9 | Nil | <5.99 | Nil | no ponding |
| 24hr | 3.9 | 0.8 | 2.22 | 92.9 | Nil | Nil   | Nil | no ponding |

Notes:

where depth of surface ponding exceeds 150mm, overflow is directed to an overflow attenuation system

Overflow requirements at 10mins to 2hr storm durations

**Critical Storm Duration : 1hr**

| 1 to 100 year return period |                                |                                |                                     |                                                  |                                  |                                             |                                        |            |
|-----------------------------|--------------------------------|--------------------------------|-------------------------------------|--------------------------------------------------|----------------------------------|---------------------------------------------|----------------------------------------|------------|
| Storm water duration (t)    | Rainfall Intensity (i) (mm/hr) | Max Surface run-off (V1) (L/s) | max outflow through soil (V2) (L/s) | rainfall depth (100 year return period) (d) (mm) | Storage required depth (Vs) (m3) | available ponding storage (150mm) (Vt) (m3) | Depth of ponding in bio-retention (mm) | comment    |
| 5 mins                      | 114.3                          | 28.9                           | 2.22                                | 12                                               | 8.00                             | >5.99                                       | 200                                    | overflow   |
| 10 mins                     | 111.4                          | 22.3                           | 2.22                                | 18.6                                             | 12.05                            | >5.99                                       | 301                                    | overflow   |
| 15 mins                     | 95.3                           | 19.1                           | 2.22                                | 23.8                                             | 15.19                            | >5.99                                       | 380                                    | overflow   |
| 30 mins                     | 66.3                           | 13.3                           | 2.22                                | 33.2                                             | 19.94                            | >5.99                                       | 499                                    | overflow   |
| 1hr                         | 45.8                           | 9.2                            | 2.22                                | 45.8                                             | 25.13                            | >5.99                                       | 628                                    | overflow   |
| 2hr                         | 29.7                           | 6                              | 2.22                                | 59.4                                             | 27.22                            | >5.99                                       | 680                                    | overflow   |
| 4hr                         | 19                             | 3.8                            | 2.22                                | 75.8                                             | 22.75                            | >5.99                                       | 569                                    | overflow   |
| 6hr                         | 15.1                           | 3                              | 2.22                                | 90.7                                             | 16.85                            | >5.99                                       | 421                                    | overflow   |
| 10hr                        | 10.4                           | 2.1                            | 2.22                                | 103.7                                            | Nil                              | <5.99                                       | Nil                                    | no ponding |
| 24hr                        | 5.5                            | 1.1                            | 2.22                                | 131.7                                            | Nil                              | <5.99                                       | Nil                                    | no ponding |

Notes:

where depth of surface ponding exceeds 150mm, overflow is directed to an overflow attenuation system

Overflow requirements at 5mins to 6 hr storm durations

**Critical Storm Duration : 2hr**

**time taken for emptying to half volume (13.61m3) = 8.42hrs < 24hrs therefore OK**



## Hydraulic Calculations for tree-pit areas

| Sub-Catchment Considered             |                  |          | :                   | Road (110m2 of road is considered for 1No Tree pit) |                          |               |             |          |
|--------------------------------------|------------------|----------|---------------------|-----------------------------------------------------|--------------------------|---------------|-------------|----------|
| SuDs Component                       |                  |          |                     | Tree pits                                           |                          |               |             |          |
| Size                                 | treepit          | =        | 2.5m x 2.5m on plan | <u>build-up:</u>                                    |                          |               |             |          |
| of                                   |                  |          | x 2.15m deep (min)  | 150mm surface ponding                               |                          |               |             |          |
| Suds                                 |                  |          |                     | 1400mm structural                                   |                          |               |             |          |
| Component                            | overflow storage | =        | 600mm               | soil                                                |                          |               |             |          |
|                                      |                  |          |                     | 400mm modular                                       |                          |               |             |          |
|                                      |                  |          |                     | crates                                              |                          |               |             |          |
|                                      |                  |          |                     | 200mm drainage                                      |                          |               |             |          |
|                                      |                  |          |                     | stone                                               |                          |               |             |          |
| Surface water run-off area           |                  |          | =                   | 110m2                                               |                          |               |             |          |
| PIMP                                 |                  |          | =                   | 100%                                                |                          |               |             |          |
| Return period                        |                  |          | =                   | 10 years and 100 years                              |                          |               |             |          |
| Climate Change factor                |                  |          | =                   | 20%                                                 |                          |               |             |          |
| -                                    |                  |          |                     |                                                     |                          |               |             |          |
| <u>Infiltration rate of soils;</u>   |                  |          |                     |                                                     |                          |               |             |          |
| Imported soil media,                 |                  |          | =                   | 300 mm/hr                                           | (8.33x10^-5 m/s)         | x 2.5m x 2.5m |             |          |
| Factor of safety                     |                  |          | =                   | 3.0                                                 | (table 25.2 Suds Manual) |               |             |          |
| factored Infiltration rate (outflow) |                  |          | =                   | 2.78 x 10^-5m/s                                     |                          | 0.174         | L/s         |          |
| of soil media                        |                  |          |                     |                                                     |                          |               |             |          |
| surface ponding storage, Vt          |                  |          | =                   | 0.15 x 2.5m x 2.5m                                  |                          |               | 0.94m3      |          |
| 1 to 100 year return period          |                  |          |                     |                                                     |                          |               |             |          |
| Storm                                | Rainfall         | Max      | max                 | rainfall                                            | Storage                  | available     | Depth       | comment  |
| water                                | Intensity        | Surface  | outflow             | depth                                               | Required                 | storage       | of          |          |
| duration                             | (100 year        | run-off  | through             | (100 year                                           |                          | within        | ponding     |          |
| (t)                                  | return           | 100 year | soil                | return                                              | (Vs)                     | drainage      | in tree-pit |          |
|                                      | (i)              | (V1)     | (V2)                | (d)                                                 |                          | (Vt)          |             |          |
|                                      | (mm/hr)          | (L/s)    | (L/s)               | (mm)                                                | (m3)                     | (m3)          | (mm)        |          |
| 5 mins                               | 114.3            | 4.4      | 0.17                | 0.7                                                 | 1.27                     | >0.94         | 203         | overflow |
| 10 mins                              | 111.4            | 3.4      | 0.17                | 18.6                                                | 1.94                     | >0.94         | 310         | overflow |
| 15 mins                              | 95.3             | 2.9      | 0.17                | 23.8                                                | 2.45                     | >0.94         | 393         | overflow |
| 30 mins                              | 66.3             | 2.0      | 0.17                | 33.2                                                | 3.29                     | >0.94         | 526         | overflow |
| 1hr                                  | 45.8             | 1.4      | 0.17                | 45.8                                                | 4.41                     | >0.94         | 706         | overflow |
| 2hr                                  | 29.7             | 0.9      | 0.17                | 59.4                                                | 6.48                     | >0.94         | 1037        | overflow |

|             |      |     |      |       |      |       |      |          |
|-------------|------|-----|------|-------|------|-------|------|----------|
| <b>4hr</b>  | 19   | 0.6 | 0.17 | 75.8  | 6.13 | >0.94 | 982  | overflow |
| <b>6hr</b>  | 15.1 | 0.5 | 0.17 | 90.7  | 7.04 | >0.94 | 1127 | overflow |
| <b>10hr</b> | 10.4 | 0.3 | 0.17 | 103.7 | 4.54 | >0.94 | 726  | overflow |
| <b>24hr</b> | 5.5  | 0.2 | 0.17 | 131.7 | 2.25 | >0.94 | 359  | overflow |

**Notes:**

where depth of surface ponding exceeds 150mm, overflow is directed to an overflow attenuation system

Overflow requirements at all storm durations

**Critical Storm Duration : 6hr**

| <b>1 to 10 year return period</b> |                                                               |                                                       |                                                    |                                                                |                                     |                                                            |                                               |               |
|-----------------------------------|---------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------|----------------------------------------------------------------|-------------------------------------|------------------------------------------------------------|-----------------------------------------------|---------------|
| Storm<br>water<br>duration<br>(t) | Rainfall<br>Intensity<br>(10 year<br>return<br>(i)<br>(mm/hr) | Max<br>Surface<br>run-off<br>10 year<br>(V1)<br>(L/s) | max<br>outflow<br>through<br>soil<br>(V2)<br>(L/s) | rainfall<br>depth<br>(10 year return<br>period)<br>(d)<br>(mm) | Storage<br>Required<br>(Vs)<br>(m3) | available<br>storage<br>within<br>drainage<br>(Vt)<br>(m3) | Depth<br>of<br>ponding<br>in tree-pit<br>(mm) | comment       |
| <b>5 mins</b>                     | 94.7                                                          | 2.9                                                   | 0.17                                               | 7.9                                                            | 0.82                                | <0.94                                                      | 131                                           | overflow      |
| <b>10 mins</b>                    | 71.3                                                          | 2.2                                                   | 0.17                                               | 11.9                                                           | 1.22                                | >0.94                                                      | 194                                           | overflow      |
| <b>15 mins</b>                    | 60.2                                                          | 1.8                                                   | 0.17                                               | 15.1                                                           | 1.46                                | >0.94                                                      | 234                                           | overflow      |
| <b>30 mins</b>                    | 41.1                                                          | 1.3                                                   | 0.17                                               | 20.5                                                           | 2.03                                | >0.94                                                      | 324                                           | overflow      |
| <b>1hr</b>                        | 28.1                                                          | 0.9                                                   | 0.17                                               | 28.1                                                           | 2.61                                | >0.94                                                      | 418                                           | overflow      |
| <b>2hr</b>                        | 18.4                                                          | 0.6                                                   | 0.17                                               | 36.8                                                           | 3.07                                | <0.94                                                      | 491                                           | overflow      |
| <b>4hr</b>                        | 11.9                                                          | 0.4                                                   | 0.17                                               | 47.8                                                           | 3.25                                | <0.94                                                      | 521                                           | overflow      |
| <b>6hr</b>                        | 9.8                                                           | 0.3                                                   | 0.17                                               | 58.6                                                           | 2.72                                | <0.94                                                      | 435                                           | overflow      |
| <b>10hr</b>                       | 6.9                                                           | 0.2                                                   | 0.17                                               | 68.9                                                           | 0.94                                | <0.94                                                      | 150                                           | overflow      |
| <b>24hr</b>                       | 3.9                                                           | 0.1                                                   | 0.17                                               | 92.9                                                           | Nil                                 | <0.94                                                      | Nil                                           | No<br>ponding |

**Notes:**

where depth of surface ponding exceeds 150mm, overflow is directed to an overflow attenuation system

Overflow requirements at all storm durations, except 24hr duration

**Critical Storm Duration : 4hr**

### 1 to 2 year return period

| Storm<br>water<br>duration<br>(t)                                                                                                                                                                                  | Rainfall<br>Intensity<br>(10 year<br>return<br>(i) | Max<br>Surface<br>run-off<br>10 year<br>(V1) | max<br>outflow<br>through<br>soil<br>(V2) | rainfall<br>depth<br>(2 year return<br>period)<br>(d) | Storage<br>Required<br>(Vs) | available<br>storage<br>within<br>drainage<br>(Vt) | Depth<br>of<br>ponding<br>in tree-pit<br>(mm) | comment        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------|-------------------------------------------|-------------------------------------------------------|-----------------------------|----------------------------------------------------|-----------------------------------------------|----------------|
|                                                                                                                                                                                                                    | (mm/hr)                                            | (L/s)                                        | (L/s)                                     | (mm)                                                  | (m3)                        | (m3)                                               | (mm)                                          |                |
| 5 mins                                                                                                                                                                                                             | 62.4                                               | 1.9                                          | 0.17                                      | 5.2                                                   | 0.52                        | <0.94                                              | 83                                            | no<br>overflow |
| 10 mins                                                                                                                                                                                                            | 46.2                                               | 1.4                                          | 0.17                                      | 7.7                                                   | 0.74                        | >0.94                                              | 118                                           | no<br>overflow |
| 15 mins                                                                                                                                                                                                            | 38.9                                               | 1.2                                          | 0.17                                      | 9.7                                                   | 0.92                        | <0.94                                              | 148                                           | no<br>overflow |
| 30 mins                                                                                                                                                                                                            | 26.6                                               | 0.8                                          | 0.17                                      | 13.3                                                  | 1.13                        | >0.94                                              | 180                                           | overflow       |
| 1hr                                                                                                                                                                                                                | 18.5                                               | 0.6                                          | 0.17                                      | 18.5                                                  | 1.53                        | >0.94                                              | 245                                           | overflow       |
| 2hr                                                                                                                                                                                                                | 12.5                                               | 0.4                                          | 0.17                                      | 25                                                    | 1.63                        | <0.94                                              | 260                                           | overflow       |
| 4hr                                                                                                                                                                                                                | 8.4                                                | 0.3                                          | 0.17                                      | 33.7                                                  | 1.81                        | <0.94                                              | 290                                           | overflow       |
| 6hr                                                                                                                                                                                                                | 7.1                                                | 0.2                                          | 0.17                                      | 42.6                                                  | 0.56                        | <0.94                                              | 90                                            | no<br>overflow |
| 10hr                                                                                                                                                                                                               | 5.1                                                | 0.2                                          | 0.17                                      | 51                                                    | 0.94                        | <0.94                                              | 150                                           | no<br>overflow |
| 24hr                                                                                                                                                                                                               | 3                                                  | 0.1                                          | 0.17                                      | 71.3                                                  | Nil                         | <0.94                                              | Nil                                           | No<br>ponding  |
| Notes:<br>where depth of surface ponding exceeds 150mm, overflow is directed to an overflow<br>attenuation system<br>Overflow requirements between 30mins and 4hr storm durations<br>Critical Storm Duration : 4hr |                                                    |                                              |                                           |                                                       |                             |                                                    |                                               |                |

## Hydraulic Calculations for Partial Road area

| Sub-Catchment Considered : Partial Rd |                                 |                                |                                     |                                                 |                       |                                                |                                                |                          |
|---------------------------------------|---------------------------------|--------------------------------|-------------------------------------|-------------------------------------------------|-----------------------|------------------------------------------------|------------------------------------------------|--------------------------|
| SuDs Component                        |                                 |                                | Dry detention area                  |                                                 |                       |                                                |                                                |                          |
| Size of Suds Component                | Detention area                  |                                |                                     |                                                 |                       |                                                |                                                |                          |
|                                       | Area                            | =                              | 12m x 12m on plan                   |                                                 |                       | allowance for ponding <170mm 720mm soil medium |                                                |                          |
|                                       |                                 |                                |                                     |                                                 |                       |                                                |                                                | 400mm attenuation crates |
|                                       | overflow storage                | =                              | 12mx12mx0.4m                        |                                                 |                       | crates                                         | 200mm drainage                                 |                          |
|                                       |                                 |                                | 12mx12mx0.2m                        |                                                 |                       | stone                                          | stone                                          |                          |
| Surface water run-off area            |                                 | =                              | 2628                                |                                                 |                       | (road and footpaths)                           |                                                |                          |
| PIMP                                  |                                 | =                              | 100%                                |                                                 |                       |                                                |                                                |                          |
| Return period                         |                                 | =                              | 10 years                            |                                                 |                       | and 100years                                   |                                                |                          |
| Climate Change factor                 |                                 | =                              | 20%                                 |                                                 |                       |                                                |                                                |                          |
| Infiltration rate of soil             |                                 |                                |                                     |                                                 |                       |                                                |                                                |                          |
| medium , i                            |                                 | =                              | 300 mm/hr                           |                                                 |                       | (8.33x10 <sup>-5</sup> m/s) x 12.0m x 12.0m    |                                                |                          |
| Factor of safety                      |                                 | =                              | 5                                   |                                                 |                       | (table 25.2 Suds Manual)                       |                                                |                          |
| factored Infiltration rate (outflow)  |                                 | =                              | 1.67x10 <sup>-5</sup> m/s           |                                                 |                       | =                                              | 2.4 L/s                                        |                          |
| of soil media                         |                                 | =                              |                                     |                                                 |                       |                                                |                                                |                          |
| sub-soil infiltration rate            |                                 | =                              | 5.88x 10 <sup>-5</sup> m/s          |                                                 |                       |                                                |                                                |                          |
| Factor of safety                      |                                 | =                              | 5                                   |                                                 |                       | (table 25.2 Suds Manual)                       |                                                |                          |
| factored Infiltration rate (outflow)  |                                 | =                              | 1.176x10 <sup>-5</sup> m/s          |                                                 |                       | =                                              | 1.69 L/s                                       |                          |
| of existing soil base                 |                                 | =                              |                                     |                                                 |                       |                                                |                                                |                          |
| 1 to 10 year return period            |                                 |                                |                                     |                                                 |                       |                                                |                                                |                          |
| Storm water duration (t)              | Rainfall Intensity (i) (mm/hr ) | Max Surface run-off (V1) (L/s) | max outflow through soil (V2) (L/s) | rainfall depth (10 year return period) (d) (mm) | Storage required (m3) | available storage (m3)                         | Depth of water level over formation level (mm) | comment                  |
| 5 mins                                | 94.7                            | 69.1                           | 1.69                                | 7.9                                             | 20.223                | 162.66                                         | 140                                            | no ponding               |
| 10 mins                               | 71.3                            | 52                             | 1.69                                | 11.9                                            | 30.186                | 162.66                                         | 210                                            | no ponding               |

|         |      |      |      |      |             |        |       |               |
|---------|------|------|------|------|-------------|--------|-------|---------------|
| 15 mins | 60.2 | 44   | 1.69 | 15.1 | 38.079      | 162.66 | 264   | no<br>ponding |
| 30 mins | 41.1 | 30   | 1.69 | 20.5 | 50.958      | 162.66 | 354   | no<br>ponding |
| 1hr     | 28.1 | 20.5 | 1.69 | 28.1 | 67.716      | 162.66 | 470   | no<br>ponding |
| 2hr     | 18.4 | 13.4 | 1.69 | 36.8 | 84.312      | 162.66 | 585.5 | no<br>ponding |
| 4hr     | 11.9 | 8.7  | 1.69 | 47.8 | 100.94<br>4 | 162.66 | 701   | no<br>ponding |
| 6hr     | 9.8  | 7.1  | 1.69 | 58.6 | 116.85<br>6 | 162.66 | 811.5 | no<br>ponding |
| 10hr    | 6.9  | 5    | 1.69 | 68.9 | 119.16      | 162.66 | 827.5 | no<br>ponding |
| 24hr    | 3.9  | 2.8  | 1.69 | 92.9 | 95.904      | 162.66 | 666   | no<br>ponding |

Notes:

No Ponding occurs at any storm duration.

**Critical Storm Duration : 10hrs**

| 1 to 100 year return period           |                                                 |                                                    |                                                            |                                                                     |                                 |                                              |                                                                          |               |
|---------------------------------------|-------------------------------------------------|----------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------|----------------------------------------------|--------------------------------------------------------------------------|---------------|
| Storm<br>water<br>duration<br><br>(t) | Rainfall<br>Intensity<br><br>(i)<br><br>(mm/hr) | Max<br>Surface<br>run-off<br><br>(V1)<br><br>(L/s) | max<br>outflow<br>through<br>soil<br><br>(V2)<br><br>(L/s) | rainfall<br>depth<br>(100 year return<br>period)<br>(d)<br><br>(mm) | Storage<br>required<br><br>(m3) | available<br>storage<br><br>(Vt)<br><br>(m3) | Depth of<br>water<br>level<br><br>over<br>formation<br>level<br><br>(mm) | comment       |
| 5 mins                                | 144.3                                           | 105.3                                              | 1.69                                                       | 12                                                                  | 30.87                           | 162.66                                       | 214                                                                      | no<br>ponding |
| 10 mins                               | 111.4                                           | 81.3                                               | 1.69                                                       | 18.6                                                                | 47.34                           | 162.66                                       | 329                                                                      | no<br>ponding |
| 15 mins                               | 95.3                                            | 69.6                                               | 1.69                                                       | 23.8                                                                | 60.48                           | 162.66                                       | 420                                                                      | no<br>ponding |
| 30 mins                               | 66.3                                            | 48.4                                               | 1.69                                                       | 33.2                                                                | 82.8                            | 162.66                                       | 575                                                                      | no<br>ponding |
| 1hr                                   | 45.8                                            | 33.4                                               | 1.69                                                       | 45.8                                                                | 111.6                           | 162.66                                       | 775                                                                      | no<br>ponding |
| 2hr                                   | 29.7                                            | 21.7                                               | 1.69                                                       | 59.4                                                                | 138.96                          | 162.66                                       | 965                                                                      | no<br>ponding |
| 4hr                                   | 19                                              | 13.8                                               | 1.69                                                       | 75.8                                                                | 164.16                          | 162.66                                       | 1140                                                                     | 10mm          |

|                                                                                                                                                                   |      |     |      |       |        |        |      |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|------|-------|--------|--------|------|---------------|
| 6hr                                                                                                                                                               | 15.1 | 11  | 1.69 | 90.7  | 185.76 | 162.66 | 1290 | 160mm         |
| 10hr                                                                                                                                                              | 10.4 | 7.6 | 1.69 | 103.7 | 187.2  | 162.66 | 1300 | 170mm         |
| 24hr                                                                                                                                                              | 5.5  | 4   | 1.69 | 131.7 | 138.24 | 162.66 | 960  | no<br>ponding |
| <b>Notes:</b><br><b>Critical Storm Duration : 10hr</b><br><br><b>time taken for emptying to half volume (93.6m<sup>3</sup>) = 15.4hrs &lt; 24hrs therefore OK</b> |      |     |      |       |        |        |      |               |
|                                                                                                                                                                   |      |     |      |       |        |        |      |               |

END

